

Sense White 255 IsoSafe 1430lm 4000K Ra>80 Trailing edge dimming

Article code: 212269
 EAN: 7021982122699

**Electrical**

System wattage: 13W
 Voltage: 220-240V
 Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
 Luminous flux: 1430lm
 Efficacy: 110 lm/W
 Colour temperature: 4000K
 Colour rendering (CRI): Ra>80
 MacAdams factor: SDCM: 3
 Lifetime: L80/B20>100,000
 Lifetime: L90>50,000
 Light distribution: Direct
 Optic: Opal
 UGR: UGR<25
 Photobiological safety: RG 0

Control/Dimming

Type: Trailing edge dimming

Protection

Luminaire class: Class II SELV
 IK Class: IK08
 IP Class: IP40/IP20

Energy and approvals

Contains light source of energy class: D
 Breeam: Fulfils Hea 01 for flicker free lighting
 BVB: Yes

Materials and finish

Housing: Aluminium
 Colour: White smooth (Ral 9016 gloss 30)
 Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Recessed, Indoor
 Connection: Screwless terminal block

Dimensions

Height (mm) H: 25
 Diameter (mm) D: 255
 Cut-out (mm): 230
 Ceiling void depth (mm): 25
 Weight (kg) gross/net: 1.21 / 1.005

Packaging

Packing dimensions (mm): 260 x 260 x 65

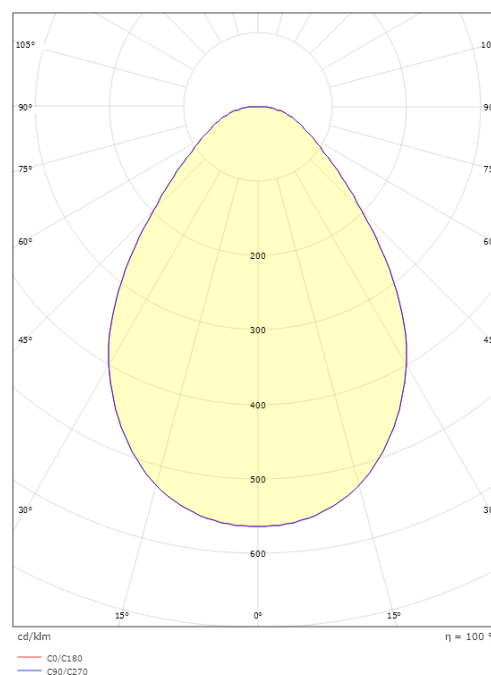

7 0 2 1 9 8 2 1 2 2 6 9 9