


Soft Slim



Soft Slim White 850lm 3000K Ra 98 Trailing edge dimming / Linect

Article code: 903215
EAN: 7021989032151



Electrical

Wattage: 9W
System wattage: 11W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
Luminous flux: 850lm
Efficacy: 77 lm/W
Colour temperature: 3000K
Colour rendering (CRI): Ra 98
MacAdams factor: SDCM: 2
Lifetime: L90/B10>100,000
Light distribution: Direct
Optic: Reflector
Beam angle: 42°
UGR: UGR<19
Photobiological safety: RG 1

Control/Dimming

Type: Trailing edge dimming / Linect

Protection

Luminaire class: Class II SELV
IP Class: IP54/IP20

Energy and approvals

Contains light source of energy class: F
Breeam: Fulfils Hea 01 for flicker free lighting
BVB: Yes

Materials and finish

Housing: Aluminium
Colour: White (RAL 9003)
Optics: Tempered glass

Mounting/Connection



Mounting: Recessed, Indoor / Outdoor
Connection: 3 pol Linect / screwless terminal block

Dimensions

Height (mm) H: 52
Diameter (mm) D: 90
Cut-out (mm): 83
Ceiling void depth (mm): 51
Distance to flammable materials: 10mm
Weight (kg) gross/net: 0.42 / 0.385

Packaging

Packing dimensions (mm): 130 x 115 x 85

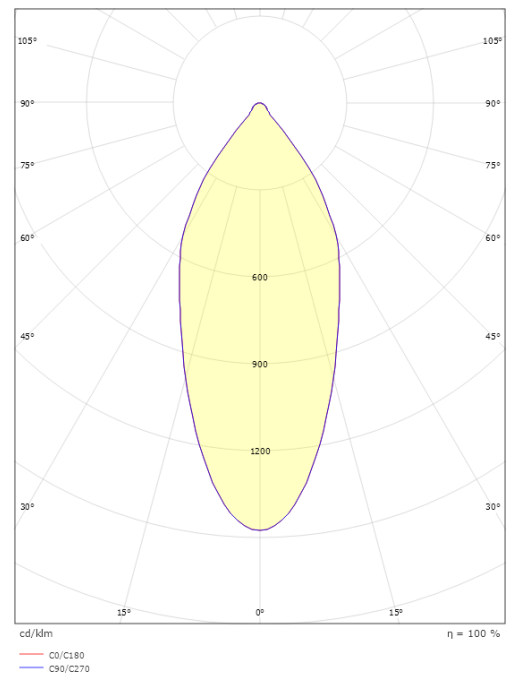

7 0 2 1 9 8 9 0 3 2 1 5 1