

## Spike Black Uplight 930lm 3000K Ra>80 Trailing edge dimming

Article code: 614913  
 EAN: 7021986149135




### Electrical

Wattage: 10W+6W  
 System wattage: 16W  
 Voltage: 220-240V

### Light technic

Type of light source: LED  
 Socket: GU10  
 Light source included: Yes  
 Luminous flux: 930lm  
 Efficacy: 58 lm/W  
 Colour temperature: 3000K  
 Colour rendering (CRI): Ra>80  
 MacAdams factor: SDCM: 3  
 Lifetime: L70/B50>50,000  
 Light distribution: Direct  
 Optic: Plastic opal/transparent  
 Beam angle: 95° down / 15° up



### Control/Dimming

Type: Trailing edge dimming

### Protection

Luminaire class: Class I

### Energy and approvals

Contains light source of energy class: E  
 Breeam: Fulfils Hea 01 for flicker free lighting  
 BVB: Yes

### Materials and finish

Housing: Aluminium  
 Colour: Black (RAL 9004)  
 Optics: UV-stabilized polycarbonate/ UV-stabilized PMMA



### Mounting/Connection


Mounting: Surface, Outdoor  
 Connection: Screwless terminal block

### Dimensions

Length (mm) L: 180  
 Width (mm) W: 171  
 Height (mm) H: 173  
 Depth (D): 155  
 Weight (kg) gross/net: 1.86 / 1.74

### Packaging

Packing dimensions (mm): 180 x 165 x 185

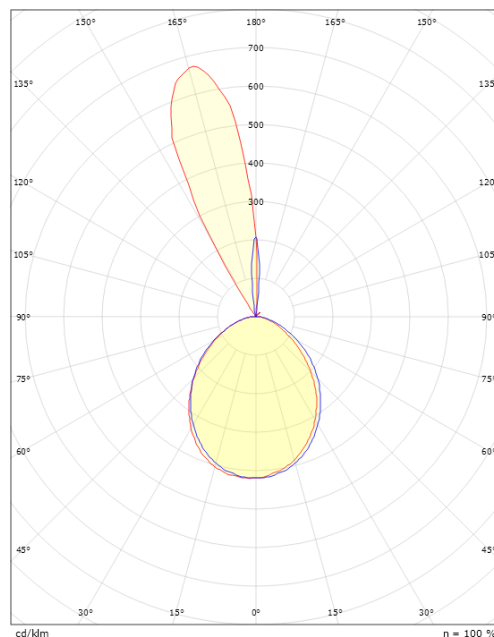

cd/m<sup>2</sup>  
 — C0/C180  
 — C90/C270



7 0 2 1 9 8 6 1 4 9 1 3 5