

## Tanto 1100 Black 330lm 3000K Ra>80 Trailing edge dimming

Article code: 644540  
 EAN: 7021986445404  
 Replaces: 614540



### Electrical

System wattage: 10W  
 Voltage: 220-240V  
 Max. luminaires per circuit breaker: B10: 33, B16: 52, C10: 40, C16: 64

### Light technic

Type of light source: LED  
 Luminous flux: 330lm  
 Efficacy: 33 lm/W  
 Colour temperature: 3000K  
 Colour rendering (CRI): Ra>80  
 MacAdams factor: SDCM: 3  
 Lifetime: L70/B50>50,000  
 Light distribution: Direct  
 Optic: Opal  
 Beam angle: 120°

### Control/Dimming

Type: Trailing edge dimming

### Protection

Luminaire class: Class II  
 Fire protection class: 850°C - 30s

### Energy and approvals

Contains light source of energy class: E  
 Breeam: Fulfils Hea 01 for flicker free lighting  
 BVB: Yes

### Materials and finish

Housing: Aluminium  
 Colour: Black (RAL 9004)  
 Optics: UV-stabilized polycarbonate

### Mounting/Connection



Mounting: Surface, Indoor / Outdoor  
 Module: 1100  
 Connection: Screwless terminal block

### Dimensions

Height (mm) H: 130  
 Diameter (mm) D: 270  
 Depth (D): 130  
 Weight (kg) gross/net: 2.05 / 1.78

### Packaging

Packing dimensions (mm): 270 x 270 x 130

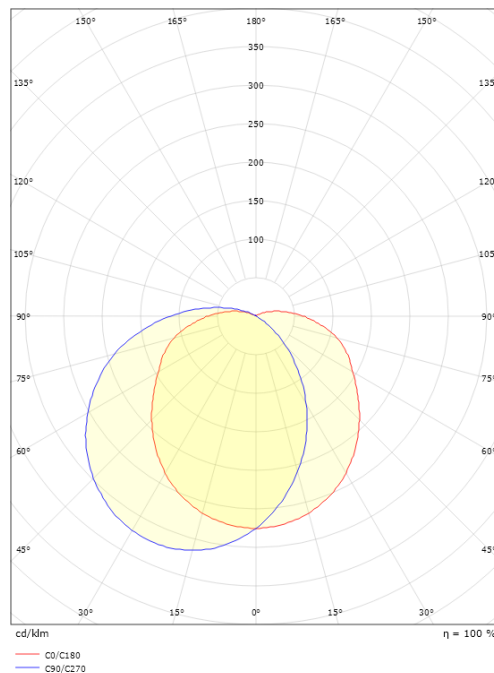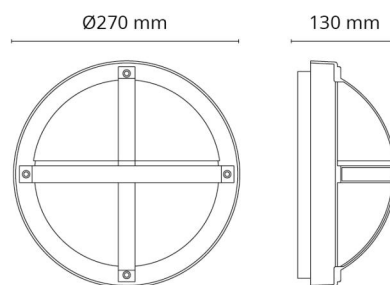

7 0 2 1 9 8 6 4 4 5 4 0 4