

Tysnes 66 1200 Grey 5040lm 4000K Ra>80 Sensor

Article code: 120035
 EAN: 7021981200350



Electrical

System wattage: 34W
 Voltage: 220-240V
 Max. luminaires per circuit breaker: B10: 14, B16: 23, C10: 22, C16: 36
 Leakage current (mA): 0.31

Light technic

Type of light source: LED
 Luminous flux: 5040lm
 Efficacy: 148 lm/W
 Colour temperature: 4000K
 Colour rendering (CRI): Ra>80
 MacAdams factor: SDCM: 3
 Lifetime: L80/B20>100,000
 Lifetime: L90>50,000
 Minimum ambient temperature: -20°C
 Light distribution: Direct
 Optic: Opal
 Beam angle: 116°

Control/Dimming

Type: Sensor

Protection

Luminaire class: Class I
 Fire protection class: 850°C - 30s

Energy and approvals

Contains light source of energy class: C

Materials and finish

Housing: UV-stabilized polycarbonate
 Colour: Grey
 Optics: UV-stabilized polycarbonate

Mounting/Connection



Mounting: Surface, Indoor
 Module: 1200
 Connection: 5-pole screwless terminal block with 3x2,5mm² and 2x1,5mm² through wiring

Dimensions

Length (mm) L: 1200
 Width (mm) W: 85
 Height (mm) H: 80
 Weight (kg) gross/net: 1.75 / 1.6

Packaging

Packing dimensions (mm): 1225 x 85 x 90

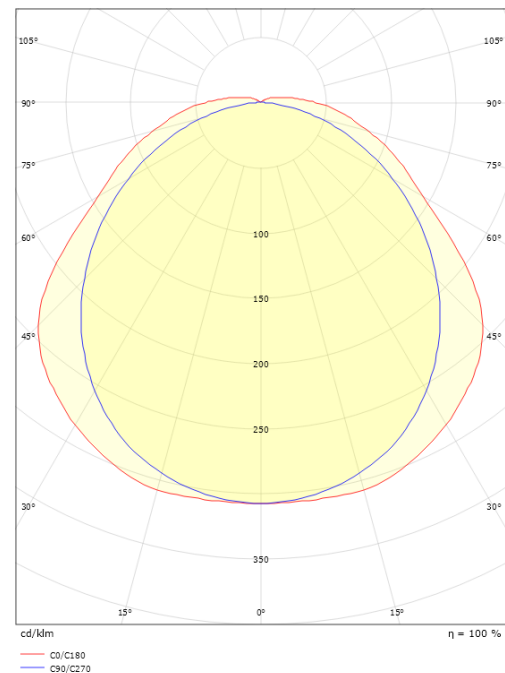

7 0 2 1 9 8 1 2 0 0 3 5 0