

## Uno 1100 Graphite 420lm 3000K Ra>80 Trailing edge dimming

Article code: 643640  
 EAN: 7021986436402



### Electrical

System wattage: 10W  
 Voltage: 220-240V  
 Max. luminaires per circuit breaker: B10: 33, B16: 52, C10: 40, C16: 64

### Light technic

Type of light source: LED  
 Luminous flux: 420lm  
 Efficacy: 42 lm/W  
 Colour temperature: 3000K  
 Colour rendering (CRI): Ra>80  
 MacAdams factor: SDCM: 3  
 Lifetime: L70/B50>50,000  
 Light distribution: Direct  
 Optic: Opal  
 Beam angle: 120°

### Control/Dimming

Type: Trailing edge dimming

### Protection

Luminaire class: Class II  
 IK Class: IK10  
 IP Class: IP65  
 Fire protection class: 850°C - 30s

### Energy and approvals

Contains light source of energy class: C  
 Breeam: Fulfils Hea 01 for flicker free lighting  
 BVB: Yes

### Materials and finish

Housing: Aluminium  
 Colour: Graphite  
 Optics: UV-stabilized polycarbonate

### Mounting/Connection



Mounting: Surface, Indoor / Outdoor  
 Module: 1100  
 Connection: Screwless terminal block

### Dimensions

Diameter (mm) D: 270  
 Depth (D): 130  
 Weight (kg) gross/net: 1.848 / 1.791

### Packaging

Packing dimensions (mm): 270 x 270 x 142

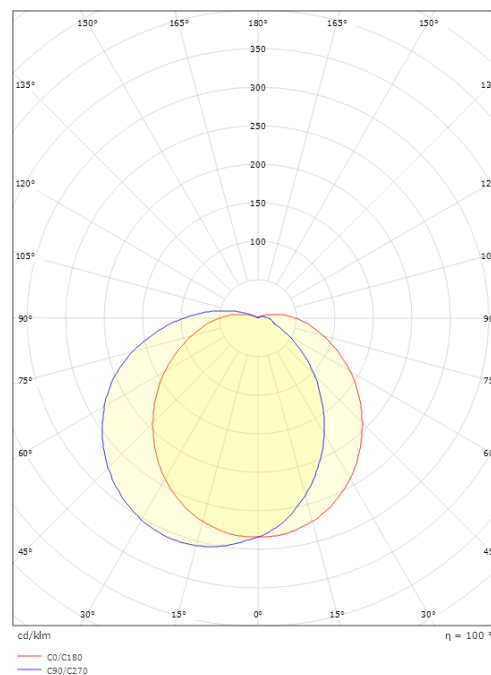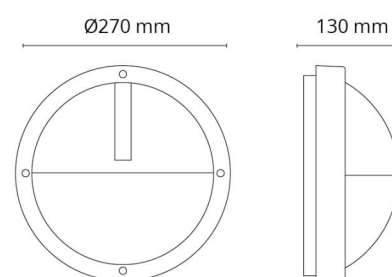

7 0 2 1 9 8 6 4 3 6 4 0 2