

Velios LED Linear



Velios LED Linear 300x1200 White 4420lm 4000K Ra>80 DALI-2

Article code: 8246079318
EAN: 5703821162326



• = This article is produced by order, with an expected delivery time of 3-4 weeks.



Electrical

System wattage: 34W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 13, B16: 24, C10: 21, C16: 38

Light technic

Type of light source: LED
Luminous flux: 4420lm
Efficacy: 130 lm/W
Colour temperature: 4000K
Colour rendering (CRI): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L90/B10>50,000
Light distribution: Direct
Optic: Lens C, prismatic Conical

Control/Dimming

Type: DALI-2

Protection

Luminaire class: Class I
IP Class: IP20

Energy and approvals

Contains light source of energy class: D
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Sheet steel
Colour: White smooth (Ral 9016 gloss 30)
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Recessed, Indoor
Module: 300x1200 Exposed T-carrier 15/24mm
Connection: 5 pol Winsta / Terminal block

Dimensions

Length (mm) L: 1195
Width (mm) W: 295
Height (mm) H: 66
Ceiling void depth (mm): 66
Weight (kg) gross/net: 6.6 / 6.4

Packaging

Packing dimensions (mm): 1250 x 310 x 100

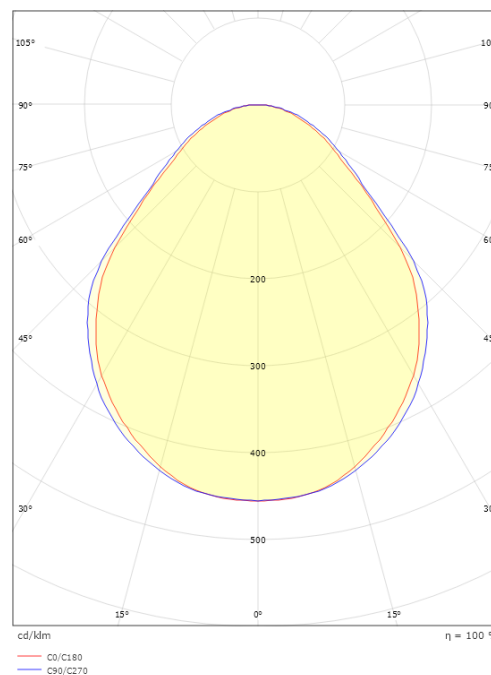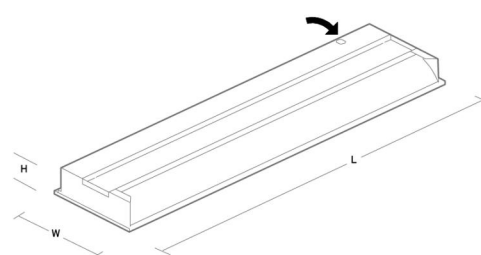

5 7 0 3 8 2 1 1 6 2 3 2 6