

**View 900 White 1860lm 4000K Ra>90 Trailing edge dimming**

Article code: 111432  
 EAN: 7021981114329


**Electrical**

System wattage: 28W  
 Voltage: 220-240V  
 Max. luminaires per circuit breaker: B10: 12, B16: 19, C10: 14, C16: 23

**Light technic**

Type of light source: LED  
 Luminous flux: 1860lm  
 Efficacy: 66 lm/W  
 Colour temperature: 4000K  
 Colour rendering (CRI): Ra>90  
 MacAdams factor: SDCM: 3  
 Lifetime: L70/B10>50,000  
 Light distribution: Direct  
 Optic: Opal  
 UGR: UGR<28  
 Photobiological safety: RG 0

**Control/Dimming**

Type: Trailing edge dimming

**Protection**

Luminaire class: Class II

**Energy and approvals**

Contains light source of energy class: E  
 Breeam: Fulfils Hea 01 for flicker free lighting

**Materials and finish**

Housing: Aluminium  
 Colour: Matte white (RAL 9003)  
 Optics: UV-stabilized polycarbonate

**Mounting/Connection**




Mounting: Surface, Indoor  
 Module: 900  
 Connection: Screwless terminal block

**Dimensions**

Length (mm) L: 896  
 Width (mm) W: 135  
 Height (mm) H: 60  
 Depth (D): 135  
 Weight (kg) gross/net: 1.621 / 1.262

**Packaging**

Packing dimensions (mm): 917 x 142 x 68

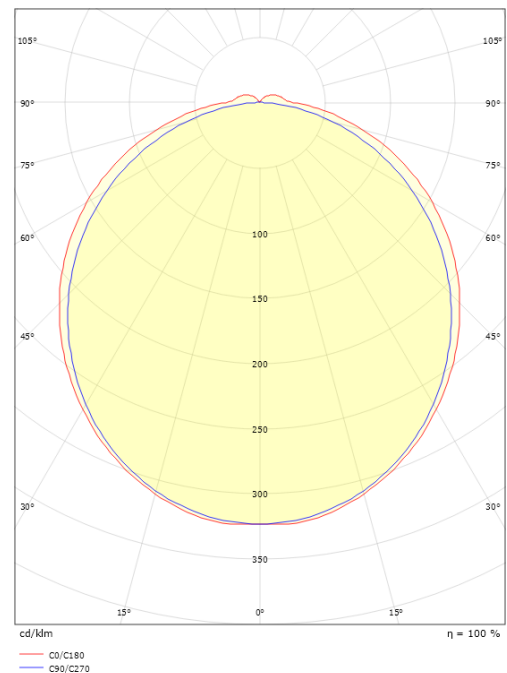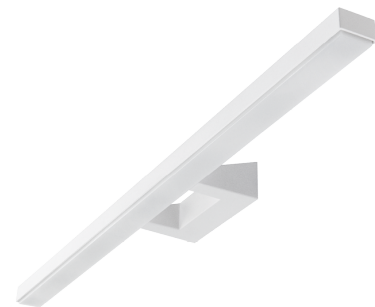

7 0 2 1 9 8 1 1 1 4 3 2 9