

**Wave 1200 White 5280lm 3000K Ra>80 On/Off**

Article code: 111175  
 EAN: 7021981111755


**Electrical**

System wattage: 42W  
 Voltage: 220-240V  
 Max. luminaires per circuit breaker: B10: 14, B16: 23, C10: 22, C16: 36  
 PE Leakage current (mA): 0.31

**Light technic**

Type of light source: LED  
 Luminous flux: 5280lm  
 Efficacy: 126 lm/W  
 Colour temperature: 3000K  
 Colour rendering (CRI): Ra>80  
 MacAdams factor: SDCM: 3  
 Lifetime: L70/B10>100,000  
 Lifetime: L80/B10>70,000  
 Light distribution: Direct  
 Optic: Opal  
 Beam angle: 110°  
 UGR: UGR<25  
 Photobiological safety: RG 0

**Control/Dimming**

Type: On/Off

**Protection**

Luminaire class: Class I

**Energy and approvals**

Contains light source of energy class: D  
 Breeam: Fulfils Hea 01 for flicker free lighting  
 BVB: Yes

**Materials and finish**

Housing: Steel, Aluminium  
 Colour: White (RAL 9003)  
 Optics: Acrylic (PMMA)

**Mounting/Connection**



Mounting: Surface, Indoor  
 Module: 1200  
 Connection: 5-pole screwless terminal block with 5x2,5mm<sup>2</sup> coupling from center to end

**Dimensions**

Length (mm) L: 1220  
 Width (mm) W: 151  
 Height (mm) H: 54  
 Weight (kg) gross/net: 3 / 2.5

**Packaging**

Packing dimensions (mm): 1245 x 160 x 60

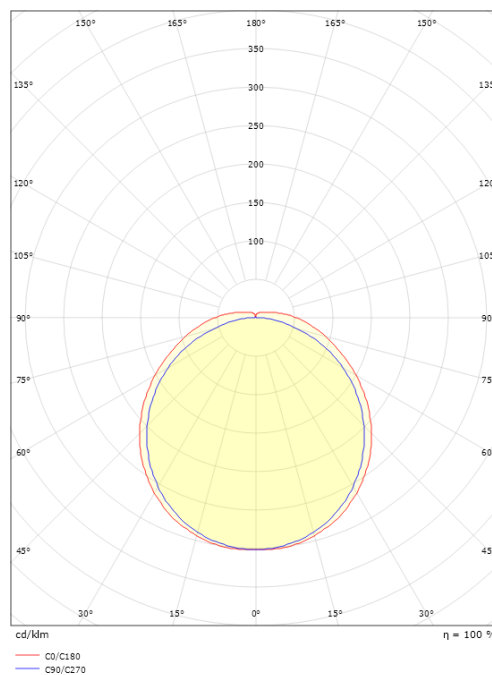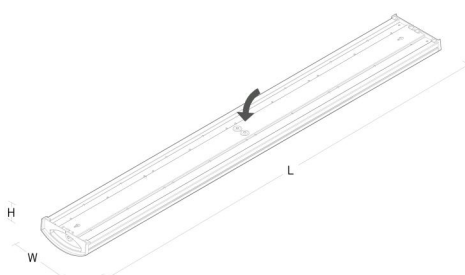

7 0 2 1 9 8 1 1 1 7 5 5