

Wax Grey 13° 3200lm 4000K Ra>80 On/Off

Article code: 8246087397
 EAN: 5703821172769

• = This article is produced by order, with an expected delivery time of 3-4 weeks.



Electrical

System wattage: 48W
 Voltage: 220-240V
 Max. luminaires per circuit breaker: B10: 32, B16: 50, C10: 52, C16: 85

Light technic

Type of light source: LED
 Luminous flux: 3200lm
 Efficacy: 67 lm/W
 Colour temperature: 4000K
 Colour rendering (Ra): Ra>80
 MacAdams factor: SDCM: 2
 Lifetime: L90/B10>100,000
 Light distribution: Direct
 Optic: Reflector spot 13dg.
 Beam angle: 13°
 ULOR (Yes, up to 64° tilt angle

Control/Dimming

Type: On/Off

Protection

Luminaire class: Class II
 IK Class: IK07
 IP Class: IP66
 Integrated surge protection: Integrated (min. 4 kV)

Energy and approvals

Contains light source of energy class: D
 Breeam: Fulfils Hea 01 for flicker free lighting
 BVB: Yes

Materials and finish

Housing: Die-cast aluminium
 Colour: Grey (structure 2150 sablé)
 Optics: Tempered glass

Mounting/Connection




Mounting: Pole, wall, bollard or earthing rod, Outdoor
 Cable: Cable 2x1mm² 10m
 Wind projected area: 0,0403m² - Max 5,3 kg

Dimensions

Height (mm) H: 268
 Diameter (mm) D: 180
 Weight (kg) gross/net: 4.66 / 4.46

Packaging

Packing dimensions (mm): 275 x 275 x 275

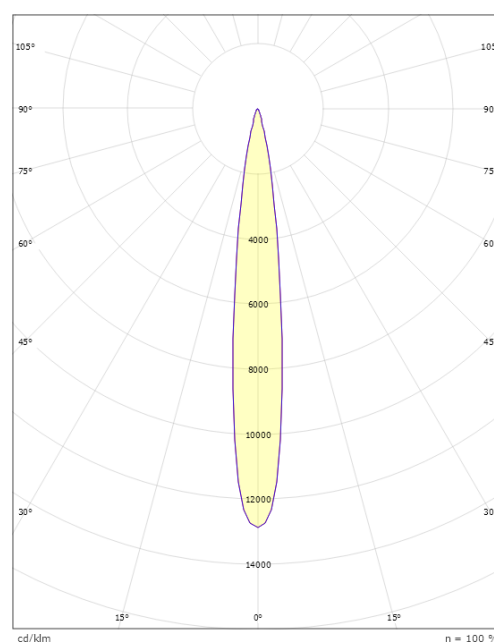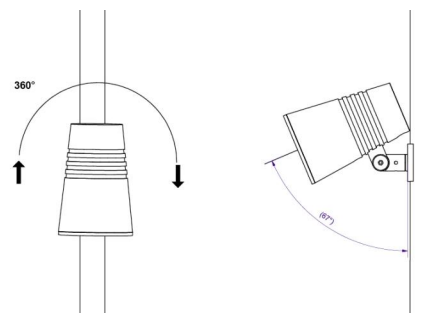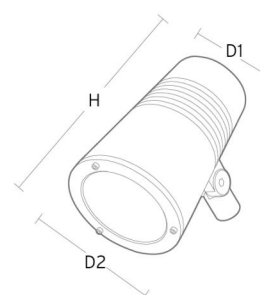

cd/kdm
 C0/C180
 C90/C270

η = 100 %



5 7 0 3 8 2 1 1 7 2 7 6 9