

Wax Grey 13° 1370/2460lm 4000K Ra>80 On/Off

Article code: 8246090698
EAN: 5703821172738

• = This article is produced by order, with an expected delivery time of 3-4 weeks.



Electrical

Wattage: 15/30W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 28, B16: 44, C10: 46, C16: 75

Light technic

Type of light source: LED
Luminous flux: 1370/2460lm
Efficacy: 91/82lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 2
Lifetime: L90/B10>100,000
Light distribution: Direct
Optic: Reflector spot 13dg.
Beam angle: 13°
ULOR (Yes, up to 64° tilt angle

Control/Dimming

Type: On/Off

Protection

Luminaire class: Class II
IK Class: IK07
IP Class: IP66
Integrated surge protection: Integrated (min. 4 kV)

Energy and approvals

Contains light source of energy class: D
Breeam: Fulfils Hea 01 for flicker free lighting
BVB: Yes

Materials and finish

Housing: Die-cast aluminium
Colour: Grey (structure 2150 sablé)
Optics: Tempered glass

Mounting/Connection




Mounting: Pole, wall, bollard or earthing rod, Outdoor
Cable: Cable 2x1mm² 10m
Wind projected area: 0,0403m² - Max 5,3 kg

Dimensions

Height (mm) H: 268
Diameter (mm) D: 180
Weight (kg) gross/net: 4.7 / 4.6

Packaging

Packing dimensions (mm): 275 x 275 x 275

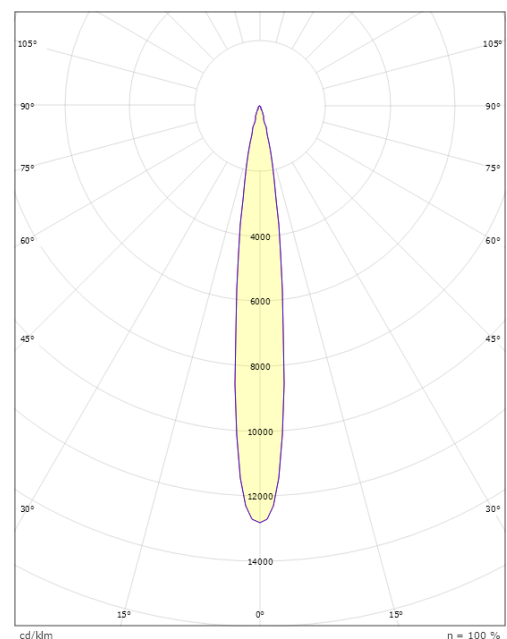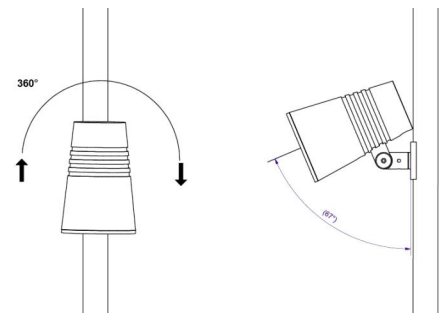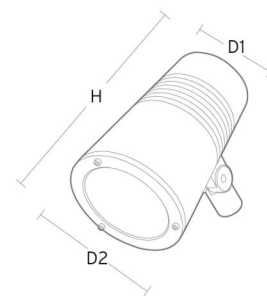

cd/kdm
C0/C180
C90/C270



5 7 0 3 8 2 1 1 7 2 7 3 8