

Wax Grey 13° 1370/2460lm 3000K Ra>80 On/Off

Article code: EAN:

Electrical Wattage:

Voltage:

Cable:

Wind projected area:

Max. luminaires per circuit breaker:

8246090724 5703821172721

• = This article is produced by order, with an expected delivery time of 3-4 weeks.



15/30W 220-240V B10: 28, B16: 44, C10: 46, C16: 75

Light technic	
Type of light source:	I FD
Luminous flux:	1370/2460lm
Efficacy:	91/82lm/W
Colour temperature:	3000K
Colour rendering (CRI):	Ra>80
MacAdams factor:	SDCM: 2
Lifetime:	L90/B10>100,000
Light distribution:	Direct
Optic:	Reflector spot 13dg.
Beam angle:	13°
Beam angle.	15
Control/Dimming	
Туре:	On/Off
Protection	
Luminaire class:	Class II
Energy and approvals	
Contains light source of energy class:	E
Breeam:	Fulfils Hea 01 for flicker free lighting
BVB:	Yes
Materials and finish	
Housing:	Die-cast aluminium
Colour:	Grey (structure 2150 sablé)
Optics:	Tempered glass
Mounting/Connection	
Mounting:	Pole, wall, bollard or earthing rod, Outdoor
-	

Pole, wall, bollard or earthing rod, Outdoor Cable 2x1mm² 10m 0,0403m² - Max 5,3 kg


Dimensions	
Height (mm) H:	268
Diameter (mm) D:	180
Weight (kg) gross/net:	4.66 / 4.46
Packaging	


Packing dimensions (mm):	275 x 275 x 275




R







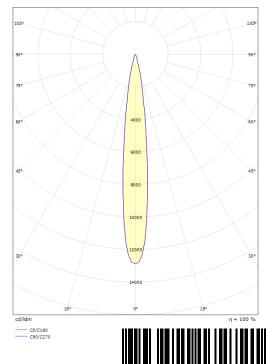

570382117272