

Inspire R TW





Inspire R TW is a rectangular recessed downlight for indoor use. With cubist black reflectors it has very low glare and harmonious non-flickering light with a well-defined light pattern. Inspire R TW is suitable for use in high-end residential and commercial environments. Tunable White from 2000-4000K or 2700-6500K. Controlled by TW LEDDim or DALI Type 8 (DALI Type 8 only version 300).

Inspire R TW





Produkt- och miljöbilder

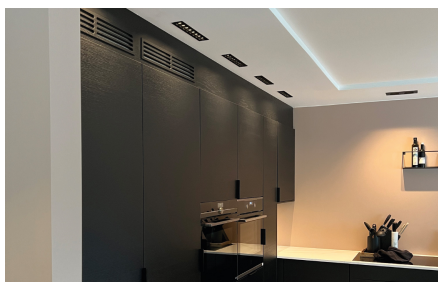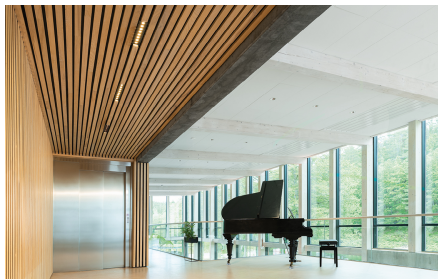

Artikel	Skydd	Styrutrustning	Montering/anslutning	Mått
 7474901 Inspire R Svart 300 970lm (@4000K) 2000-4000K Ra>90 TW DALI Type 8 17W LED 57 lm/W SDCM:2 L90/B10>100.000 Beam: 55°, Direkt, Lins	Klass II SELV IP20	TW DALI Type 8	Infälld, Indoor Skruvlös kopplingsplint	L303 x W62 x H40
 7474895 Inspire R Svart 150 500lm (@ 4000K) 2000-4000K Ra>90 TW LEDDim 10W LED 50 lm/W SDCM:2 L90/B10>100.000 Beam: 55°, Direkt, Lins	Klass II SELV IP20	TW LEDDim	Infälld, Indoor Skruvlös kopplingsplint	L163 x W62 x H40
 7474897 Inspire R Svart 300 970lm (@4000K) 2000-4000K Ra>90 TW LEDDim 17W LED 57 lm/W SDCM:2 L90/B10>100.000 Beam: 55°, Direkt, Lins	Klass II SELV IP20	TW LEDDim	Infälld, Indoor Skruvlös kopplingsplint	L303 x W62 x H40
 7474900 Inspire R Vit 300 970lm (@4000K) 2000-4000K Ra>90 TW DALI Type 8 17W LED 57 lm/W SDCM:2 L90/B10>100.000 Beam: 55°, Direkt, Lins	Klass II SELV IP20	TW DALI Type 8	Infälld, Indoor Skruvlös kopplingsplint	L303 x W62 x H40
 7474894 Inspire R Vit 150 500lm (@ 4000K) 2000-4000K Ra>90 TW LEDDim 10W LED 50 lm/W SDCM:2 L90/B10>100.000 Beam: 55°, Direkt, Lins	Klass II SELV IP20	TW LEDDim	Infälld, Indoor Skruvlös kopplingsplint	L163 x W62 x H40
 7474896 Inspire R Vit 300 970lm (@4000K) 2000-4000K Ra>90 TW LEDDim 17W LED 57 lm/W SDCM:2 L90/B10>100.000 Beam: 55°, Direkt, Lins	Klass II SELV IP20	TW LEDDim	Infälld, Indoor Skruvlös kopplingsplint	L303 x W62 x H40

Artikel	Skydd	Styrutrustning	Montering/anslutning	Mått
 7475109 Inspire R Svart 300 1080lm (@6500K) 2700-6500K Ra>90 TW DALI Type 8 17W LED 64 lm/W SDCM:2 L90/B10>100.000 Beam: 55°, Direkt, Lins	Klass II SELV IP20	TW DALI Type 8	Infälld, Indoor Skruvlös kopplingsplint	L303 x W62 x H40
 7475105 Inspire R Svart 150 560lm (@6500K) 2700-6500K Ra>90 TW LEDDim 10W LED 56 lm/W SDCM:2 L90/B10>100.000 Beam: 55°, Direkt, Lins	Klass II SELV IP20	TW LEDDim	Infälld, Indoor Skruvlös kopplingsplint	L163 x W62 x H40
 7475108 Inspire R Svart 300 1080lm (@6500K) 2700-6500K Ra>90 TW LEDDim 17W LED 64 lm/W SDCM:2 L90/B10>100.000 Beam: 55°, Direkt, Lins	Klass II SELV IP20	TW LEDDim	Infälld, Indoor Skruvlös kopplingsplint	L303 x W62 x H40
 7475107 Inspire R Vit 300 1080lm (@6500K) 2700-6500K Ra>90 TW DALI Type 8 17W LED 64 lm/W SDCM:2 L90/B10>100.000 Beam: 55°, Direkt, Lins	Klass II SELV IP20	TW DALI Type 8	Infälld, Indoor Skruvlös kopplingsplint	L303 x W62 x H40
 7475104 Inspire R Vit 150 560lm (@6500K) 2700-6500K Ra>90 TW LEDDim 10W LED 56 lm/W SDCM:2 L90/B10>100.000 Beam: 55°, Direkt, Lins	Klass II SELV IP20	TW LEDDim	Infälld, Indoor Skruvlös kopplingsplint	L163 x W62 x H40
 7475106 Inspire R Vit 300 1080lm (@6500K) 2700-6500K Ra>90 TW LEDDim 17W LED 64 lm/W SDCM:2 L90/B10>100.000 Beam: 55°, Direkt, Lins	Klass II SELV IP20	TW LEDDim	Infälld, Indoor Skruvlös kopplingsplint	L303 x W62 x H40

Artikel	Skydd	Styrutrustning	Montering/anslutning	Mått
 7476982 Inspire Guld 150 Reflektor				L140 x W38 x H16
 7476983 Inspire Guld 300 Reflektor				L280 x W38 x H16
 7476958 Inspire Vit 150 Reflektor				L140 x W38 x H16
 7476981 Inspire Vit 300 Reflektor				L280 x W38 x H16
 7345356 Nödljusbox Adapter kit för downlight				L250 x W13 x H13
 7344588 Nödljusbox On-Off/Bakkantsdim / EM Självtest, Nödbelysning 3 timmar				L270 x W75 x H35
 7345302 Nödljusbox Driver DALI / EM DALI/Självtest, Nödbelysning 3 timmar				L270 x W75 x H35