


DiLED III Linear




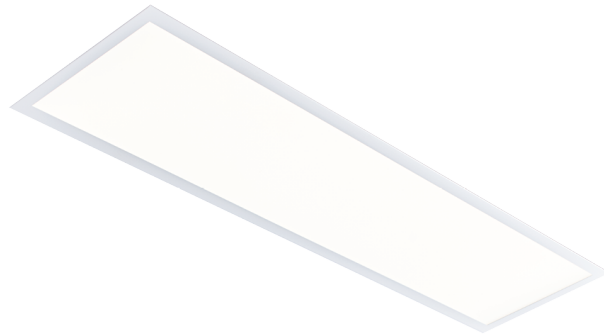





Luminaire for recessed mounting, direct LED luminaire, 300x1200 mm, steel suitable for most known ceiling systems (some require accessories). Opal optical front made of acrylic PMMA, which ensures a uniformly lit surface. Complete with electronic driver or DALI. Integrated Winsta/Wago plug. Supplied with 3000K or 4000K LED

DiLED III Linear

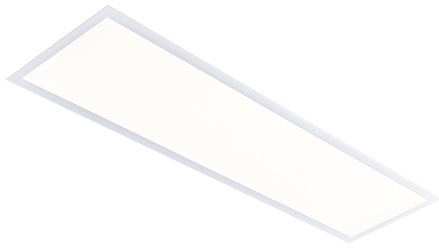

Product- and environment images



Article	Protection	Control gear	Mounting/Connection	Dimensions
4000K				
 8246092544 • DiLED Ili Linear 297x1194 White 4050lm 4000K Ra>80 DALI Emergency 3H 30W LED 135 lm/W SDCM:3 L80/B10>60,000 Direct, Opal	Class I IP20	DALI Emergency 3H	Recessed, Indoor 5 pol Winsta / Terminal block	L1194 x W297 x H90
 8246092638 • DiLED Ili Linear 297x1194 White 4050lm 4000K Ra>80 DALI-2 30W LED 135 lm/W SDCM:3 L80/B10>60,000 Direct, Opal	Class I IP20	DALI-2	Recessed, Indoor 5 pol Winsta / Terminal block	L1194 x W297 x H90
Others				
 820307 Emergency battery 3 Hours 3.0Ah - Model No: B093				L137 x W27 x H27
Accessories				
 8246094364 Emergencybox On-Off/Trailing edge / EM Self test, Emergency 3 hours				L270 x W75 x H35
 8246094429 Emergencybox Driver DALI / EM Self test, DALI Emergency 3H				L270 x W75 x H35
 8246094500 Emergencybox Driver DALI / EM DALI/Self test, Emergency 3 hours				L270 x W75 x H35

• = This article is produced by order, with an expected delivery time of 3-4 weeks.