

Sense Pro Connect 600x600



Sense Pro Connect 600x600 White 3000K Ra>90 Connect

Article code: 212793
EAN: 7021982127939



Electrical

Voltage: 33V
Frequency (Hz): 50/60Hz
Leakage current (mA): 0.50

Light technic

Type of light source: LED
Light source included: Yes
Colour temperature: 3000K
Colour rendering (Ra): Ra>90
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90>50,000
Light distribution: Direct
Optic: Opalprism
Beam angle: 110°
Photobiological safety: RG 0

Control/Dimming

Type: Connect

Protection

Luminaire class: Class III
IK Class: IK10
IP Class: IP40/IP20

Energy and approvals

Contains light source of energy class: D

Materials and finish

Housing: Aluminium
Colour: White smooth (Ral 9016 gloss 30)
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Recessed, Indoor
Module: 600x600 Exposed T-carrier 15/24mm
Connection: Quick connector

Dimensions

Length (mm) L: 597
Width (mm) W: 597
Height (mm) H: 11
Weight (kg) gross/net: 3.225 / 2.8

Packaging

Packing dimensions (mm): 633 x 630 x 33

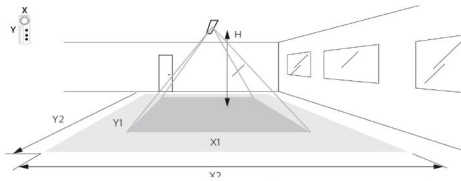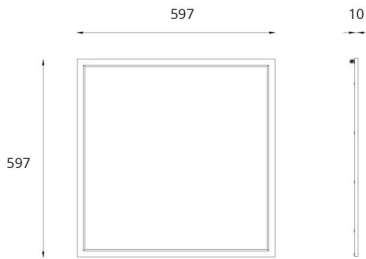

H (m)	Minor movements		Major movements	
	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
2.4	1.9	2.9	2.9	4.3
3	2.4	3.6	3.6	5.4



7 0 2 1 9 8 2 1 2 7 9 3 9