

# Arena Eco



## Arena ECO 1500 Wide 10960lm 4000K Ra>80 DALI-2

Article code: 607020  
EAN: 7021986070200



### Electrical

Wattage: 76W  
System wattage: 76W  
Voltage: 220-240V  
Max. luminaires per circuit breaker: B10: 15, B16: 24, C10: 25, C16: 40  
Leakage current (mA): 0.30

### Light technic

Luminous flux: 10960lm  
Efficacy: 144 lm/W  
Colour temperature: 4000K  
Colour rendering (Ra): Ra>80  
MacAdams factor: SDCM: 3  
Lifetime: L80/B20>100,000  
Lifetime: L90>50,000  
Minimum ambient temperature: -25°C  
Light distribution: Direct  
Beam angle: 90°  
UGR: UGR<25  
Photobiological safety: RG 1

### Control/Dimming

Type: DALI-2

### Protection

Luminaire class: Class I  
IK Class: IK10  
IP Class: IP23

### Energy and approvals

Contains light source of energy class: C  
Breeam: Fulfils Hea 01 for flicker free lighting

### Materials and finish

Housing: Steel  
Optics: Acrylic (PMMA)

### Mounting/Connection


Mounting: Surface, Indoor  
Module: 1500  
Connection: 7-pole screwless terminal block with 5x2,5mm2 (+DALI) through wiring

### Dimensions

Length (mm) L: 1552  
Width (mm) W: 134  
Height (mm) H: 72  
Weight (kg) gross/net: 4.1 / 3.8

### Packaging

Packing dimensions (mm): 1596 x 76 x 148

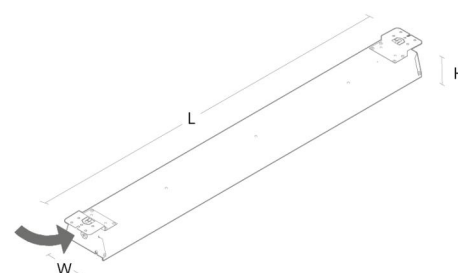

7 0 2 1 9 8 6 0 7 0 2 0 0