

Arena 600 3-T



Arena 600 3-T White Medium 4100lm 4000K Ra>90 On/Off

Article code: 607042
EAN: 7021986070422



Electrical

System wattage: 26W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 32, B16: 50, C10: 52, C16: 85

Light technic

Type of light source: LED
Luminous flux: 4100lm
Efficacy: 158 lm/W
Colour temperature: 4000K
Colour rendering (CRI): Ra>90
MacAdams factor: SDCM: 3
Lifetime: L90/B10>100,000
Light distribution: Direct
Beam angle: 60°
UGR: UGR<25
Visible flicker (PstLM): 0.02
Stroboscopic flicker (SVM): 0

Control/Dimming

Type: On/Off
Driver: 750mA

Protection

Luminaire class: Class II SELV
IP Class: IP20

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Surface, Indoor
Connection: ShopLine track (adapter included)

Dimensions

Length (mm) L: 583
Width (mm) W: 69
Height (mm) H: 69
Weight (kg) gross/net: 1.14 / 0.91

Packaging

Packing dimensions (mm): 600 x 85 x 120

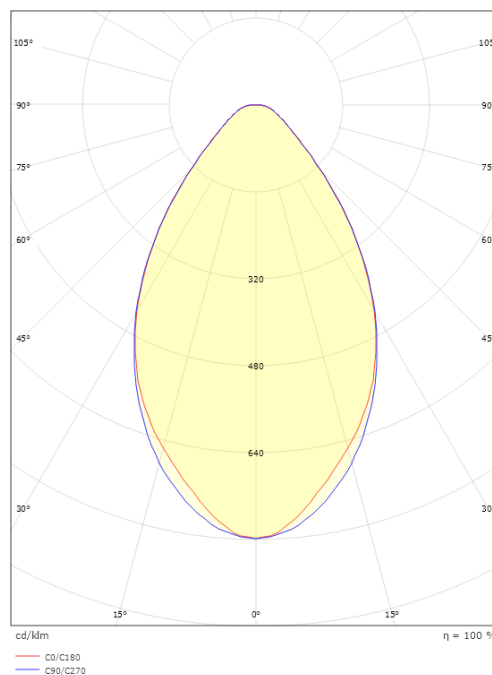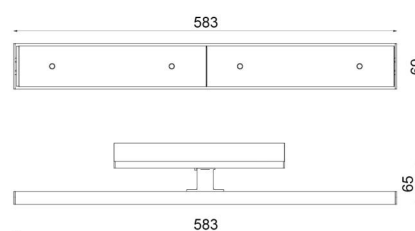

7 0 2 1 9 8 6 0 7 0 4 2 2