

Basic White 8030lm 3000K Ra>80 Emergency 3H

Article code: 8246087575  
EAN: 5703821168434

• = This article is produced by order, with an expected delivery time of 3-4 weeks.



Electrical

System wattage: 46W  
Voltage: 220-240V  
Max. luminaires per circuit breaker: B10: 15, B16: 24, C10: 25, C16: 41

Light technic

Type of light source: LED  
Luminous flux: 8030lm  
Emergency lumen: EM 540 lm  
Efficacy: 175 lm/W  
Colour temperature: 3000K  
Colour rendering (CRI): Ra>80  
MacAdams factor: SDCM: 3  
Lifetime: L80/B10>50,000  
Minimum ambient temperature: 0°C  
Light distribution: Direct  
Optic: Opal optic  
UGR: UGR<25

Control/Dimming

Type: Emergency 3H

Protection

Luminaire class: Class I  
IP Class: IP20

Energy and approvals

Contains light source of energy class: D  
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Sheet steel  
Colour: White (Pure white, 25% gloss)  
Optics: Acrylic (PMMA)

Mounting/Connection




Mounting: Surface, Indoor  
Connection: Screwless terminal block

Dimensions

Length (mm) L: 1530  
Width (mm) W: 230  
Height (mm) H: 85  
Weight (kg) gross/net: 7.7 / 7.5

Packaging

Packing dimensions (mm): 1540 x 240 x 90

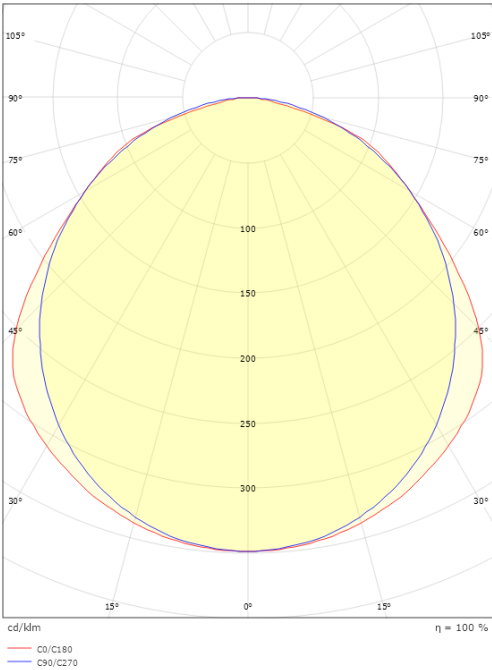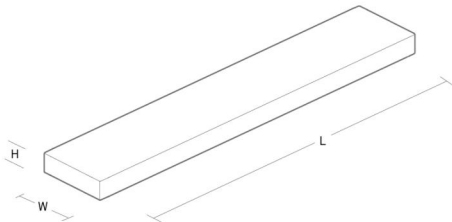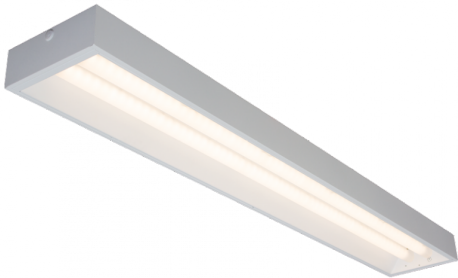

5 7 0 3 8 2 1 1 6 8 4 3 4