



Facet



Slim, minimalistic luminaire with direct/indirect light. Perfect for offices and over desks with glare-free optic in PMMA. Delivered with 2,5 meter cable and 2x2 meter suspension wires. Quick installation with plug and play solution.

Product- en omgevingsbeelden

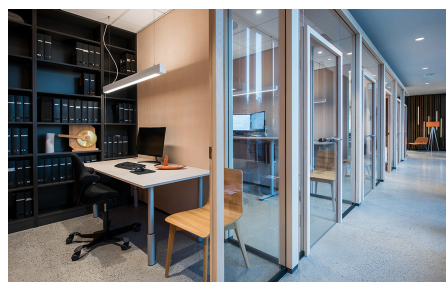

Artikel	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
	8246082499	Klasse I	DALI-2 / Push Dim	Ophanging, Indoor
	Facet Wit 3240lm 3000K Ra>80 DALI-2 / Push Dim 23W LED 141 lm/W SDCM:3 L80/B10>100,000, L94>50,000 Directe/Indirecte 60/40%, Lens C, prismatisch conisch	IP20	2 X 2 m kabelkit met lus M4 Kabel 5x0,75mm ² 2,5m Wit	L1164 x W64 x H80
	8246094270	Klasse I	DALI-2 / Push Dim	Ophanging, Indoor
	Facet Wit 5030lm 3000K Ra>80 DALI-2 / Push Dim 35W LED 144 lm/W SDCM:3 L80/B10>100,000, L94>50,000 Direct/Indirect 50/50%, Lens C, prismatisch conisch	IP20	2 X 2 m kabelkit met lus M4 Kabel 5x0,75mm ² 2,5m Wit	L1444 x W64 x H80
	8246086042	Klasse I	Niet dimbaar	Ophanging, Indoor
	Facet Wit 3240lm 3000K Ra>80 Niet dimbaar 23W LED 141 lm/W SDCM:3 L80/B10>100,000, L94>50,000 Directe/Indirecte 60/40%, Lens C, prismatisch conisch	IP20	2 X 2 m kabelkit met lus M4 Kabel 3x0,75mm ² 2,5m w/ Schuko white	L1164 x W64 x H80
	8246094267	Klasse I	Niet dimbaar	Ophanging, Indoor
	Facet Wit 5030lm 3000K Ra>80 Niet dimbaar 35W LED 144 lm/W SDCM:3 L80/B10>100,000, L94>50,000 Direct/Indirect 50/50%, Lens C, prismatisch conisch	IP20	2 X 2 m kabelkit met lus M4 Kabel 3x0,75mm ² 2,5m w/ Schuko white	L1444 x W64 x H80
	8246086068	Klasse I	DALI-2 / Push Dim	Ophanging, Indoor
	Facet Wit 3380lm 4000K Ra>80 DALI-2 / Push Dim 23W LED 147 lm/W SDCM:3 L80/B10>100,000, L94>50,000 Directe/Indirecte 60/40%, Lens C, prismatisch conisch	IP20	2 X 2 m kabelkit met lus M4 Kabel 5x0,75mm ² 2,5m Wit	L1164 x W64 x H80

Artikel	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
 8246086055 Facet Wit 3380lm 4000K Ra>80 Niet dimbaar 23W LED 147 lm/W SDCM:3 L80/B10>100,000, L94>50,000 Directe/Indirecte 60/40%, Lens C, prismatisch conisch	Klasse I IP20	Niet dimbaar	Ophanging, Indoor 2 X 2 m kabelkit met lus M4 Kabel 3x0,75mm² 2,5m w/ Schuko white	L1164 x W64 x H80
Accessoires				
 212198 Zwart T-drager plafondbevestiging				L30 x W20 x H5
 212255 T-profil Wit Ophangrail 600mm				L596 x W35 x H17
 8249044007 Facet II Wit Wandbeugels kit				L490 x W70 x H70
 820307 Noodverlichting batterij 3 Hours 3.0Ah - Model No: B093				L137 x W27 x H27