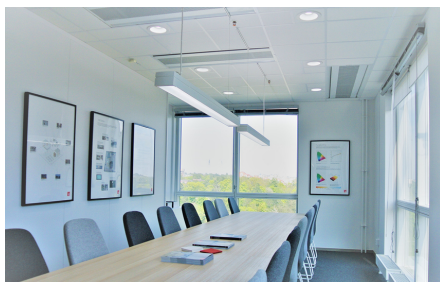




Facet II TW



Facet II is a slim, minimalistic luminaire with white powdercoating. With the direct/indirect light and glare-free optics in PMMA it is perfect for classrooms or open offices where light comfort is very important. The wall bracket (accessory) makes it a perfect choice for blackboard lighting. Plug-and-play solution for quick installation. Tunable White from 2700 Kelvin to 6500 Kelvin white light, controlled by TW LEDDim or Dali Type 8.

Product- en omgevingsbeelden



Artikel	Bescherming	Regelapparatuur	Montage/Aansluiting	Afmetingen
 8246091817 Facet II TW 1200 Wit 4530lm 2700-6500K Ra>80 TW DALI Type 8 39W LED 116 lm/W SDCM:3 L80/B10>100,000, L94>50,000 Direct/Indirect 65/35%, Lens C, prismatisch conisch	Klasse I IP20	TW DALI Type 8	Ophanging, Indoor 2 X 2 m kabelkit met lus M4 Kabel 5x0,75mm² 2,5m Wit	L1196 x W112 x H80
 8246094542 Facet II TW 1200 Wit 4674lm (@6500K) 2700-6500K Ra>80 TW LEDDim 38W LED 123 lm/W SDCM:3 L80/B10>100,000, L94>50,000 Direct/Indirect 65/35%, Lens C, prismatisch conisch	Klasse I IP20	TW LEDDim	Ophanging, Indoor 2 X 2 m kabelkit Kabel 3x0,75mm² 2,5m w/ Schuko white	L1196 x W112 x H80
Accessoires				
 212255 T-profil Wit Ophangrail 600mm				L596 x W35 x H17
 8249044007 Facet II Wit Wandbeugels kit				L490 x W70 x H70