



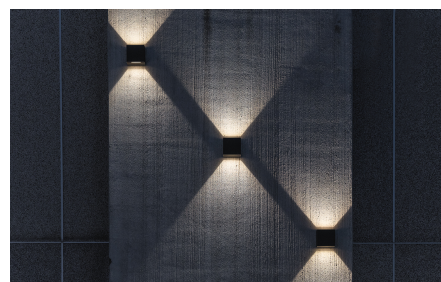

Artes Midi is a decorative and stylish outdoor luminaire for wall mounting. It is possible to make an individual gradual adjustment of the light angle/light distribution up and down. Made of die-cast, powder-coated aluminium. Dimmable with phase control dimmer. We recommend LEDDim and LEDDim Smart. Easy installation with wall bracket together with quick clips and two cable inputs.

Product- en omgevingsbeelden

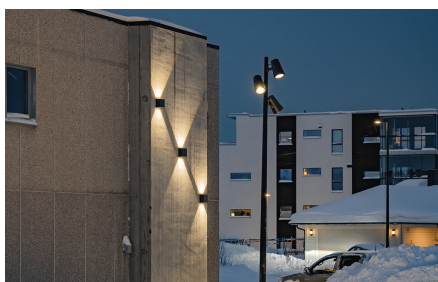

Artikel	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
 641715 Artes Midi Zwart 980lm 2700K Ra>80 Fase afsnijding 32W LED 31 lm/W SDCM:3 L70/B10>100,000, L80/B50>80,000 Beam: 60°, Lens	Klasse II IP65 IK10	r Fase afsnijding	Wand, Indoor / Outdoor Schroefloos klemmenblok	L205 x W205 x H125
 641712 Artes Midi Grafiet 960lm 2700K Ra>80 Fase afsnijding 32W LED 30 lm/W SDCM:3 L70/B10>100,000, L80/B50>80,000 Beam: 60°, Lens	Klasse II IP65 IK10	Fase afsnijding	Wand, Indoor / Outdoor Schroefloos klemmenblok	L205 x W205 x H125
 641709 Artes Midi Wit 1560lm 2700K Ra>80 Fase afsnijding 32W LED 49 lm/W SDCM:3 L70/B10>100,000, L80/B50>80,000 Beam: 60°, Lens	Klasse II IP65 IK10	Fase afsnijding	Wand, Indoor / Outdoor Schroefloos klemmenblok	L205 x W205 x H125
 641716 Artes Midi Zwart 1030lm 3000K Ra>80 Fase afsnijding 32W LED 32 lm/W SDCM:3 L70/B10>100,000, L80/B50>80,000 Beam: 60°, Lens	Klasse II IP65 IK10	Fase afsnijding	Wand, Indoor / Outdoor Schroefloos klemmenblok	L205 x W205 x H125
 641713 Artes Midi Grafiet 1010lm 3000K Ra>80 Fase afsnijding 32W LED 32 lm/W SDCM:3 L70/B10>100,000, L80/B50>80,000 Beam: 60°, Lens	Klasse II IP65 IK10	Fase afsnijding	Wand, Indoor / Outdoor Schroefloos klemmenblok	L205 x W205 x H125
 641710 Artes Midi Wit 1640lm 3000K Ra>80 Fase afsnijding 32W LED 51 lm/W SDCM:3 L70/B10>100,000, L80/B50>80,000 Beam: 60°, Lens	Klasse II IP65 IK10	Fase afsnijding	Wand, Indoor / Outdoor Schroefloos klemmenblok	L205 x W205 x H125

Artikel	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
 641717 Artes Midi Zwart 1100lm 4000K Ra>80 Fase afsnijding 32W LED 34 lm/W SDCM:3 L70/B10>100,000, L80/B50>80,000 Beam: 60°, Lens	Klasse II IP65 IK10	r Fase afsnijding	Wand, Indoor / Outdoor Schroefloos klemmenblok	L205 x W205 x H125
 641714 Artes Midi Grafiet 1080lm 4000K Ra>80 Fase afsnijding 32W LED 34 lm/W SDCM:3 L70/B10>100,000, L80/B50>80,000 Beam: 60°, Lens	Klasse II IP65 IK10	Fase afsnijding	Wand, Indoor / Outdoor Schroefloos klemmenblok	L205 x W205 x H125
 641711 Artes Midi Wit 1760lm 4000K Ra>80 Fase afsnijding 32W LED 55 lm/W SDCM:3 L70/B10>100,000, L80/B50>80,000 Beam: 60°, Lens	Klasse II IP65 IK10	Fase afsnijding	Wand, Indoor / Outdoor Schroefloos klemmenblok	L205 x W205 x H125