




Arena Eco Connect is an energy-efficient and practical LED luminaire for warehouses and industrial environments, featuring an integrated SG Connect sensor for smart and energy-saving lighting control. The sensor switches the light on when motion is detected and off after a defined time period, ensuring significant energy savings. It also includes a built-in daylight sensor that can be activated to maintain the desired light level at all times. Arena Eco Connect is available with two sensor variants: Low-Bay for mounting heights up to 5 meters and Mid-Bay for heights up to 12 meters, ensuring optimal detection regardless of installation height. Configuration is simple via the SG Connect Commissioning App, and the luminaire can be used as a standalone unit or as part of a larger system that can easily be expanded or reconfigured as needed. Arena Eco Connect combines high performance with easy installation. It features a hinged component box for quick mounting and can be installed directly on the ceiling with screws or using mounting hooks for horizontal wires. Pre-installed through-wiring and cable entry at both ends make installation even more efficient.

Arena Eco Connect



Produkt- und Umgebungsbilder



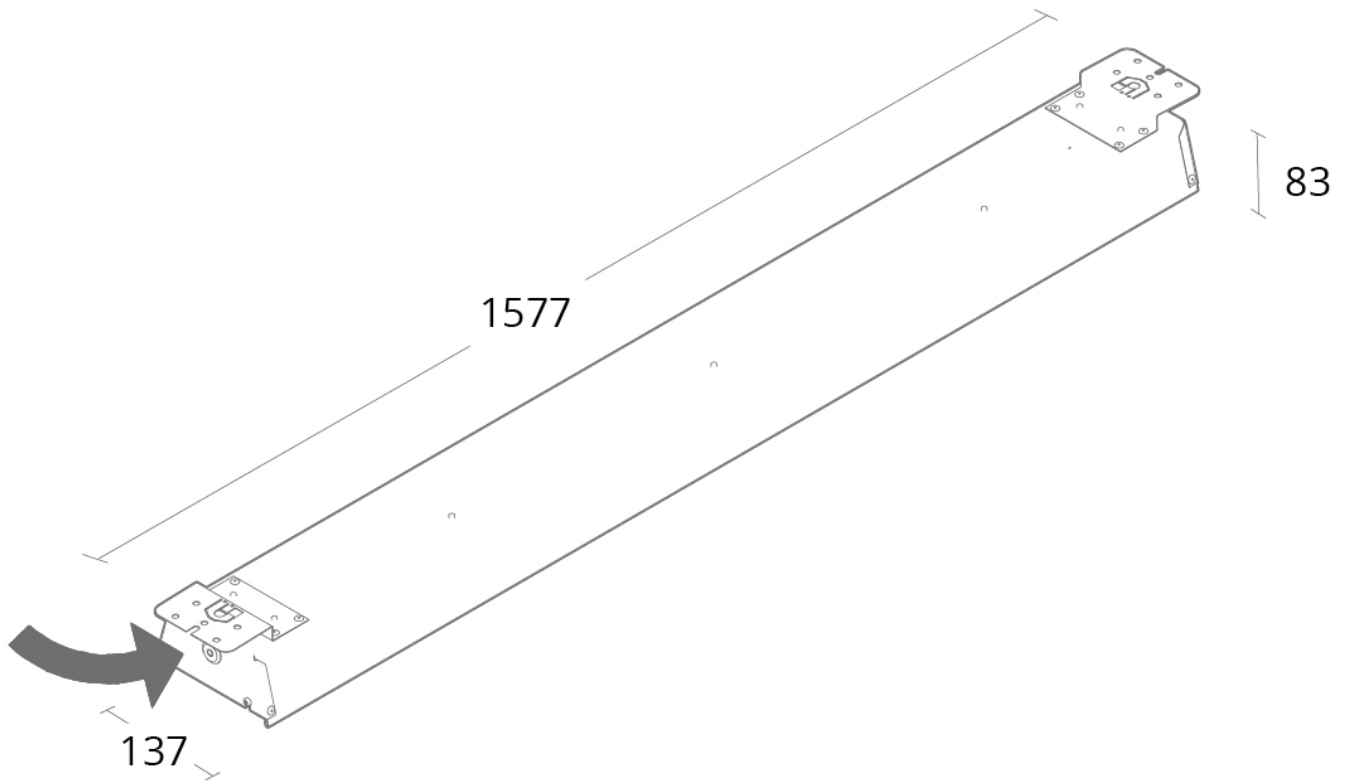

Die Abmessungen der Strichzeichnungen finden Sie unter den einzelnen Artikelcodes auf der nächsten Seite



Artikel	Schutzklasse	Controller	Montage/Anschluss	Grösse
 <div>607026 Arena Eco Connect Low-Bay 1500 Grau Wide 10960lm 4000K Ra>80 Connect 76W LED 144 lm/W SDCM:3 L80/B20>100.000, L90>50.000 Beam: 90°, Direkt, Linse</div>	Klasse I IP20	Connect	Anbau, Indoor 5-polige Anschlussklemme mit Durchgangsverdrahtung 5 × 2,5 mm²	L1552 x W134 x H72