

Illusion Soft LED



Illusion Soft LED 600x600 3790lm 4000K Ra>80 DALI Emergency 3H

Article code: 8246086217
EAN: 5703821170307



• = This article is produced by order, with an expected delivery time of 3-4 weeks.



Electrical

System wattage: 30W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 17, B16: 28, C10: 27, C16: 45

Light technic

Type of light source: LED
Luminous flux: 3790lm
Emergency lumen: EM 600lm
Efficacy: 126 lm/W
Colour temperature: 4000K
Colour rendering (CRI): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B10>60,000
Minimum ambient temperature: 0°C
Light distribution: Direct
Optic: Opalprism

Control/Dimming

Type: DALI Emergency 3H

Protection

Luminaire class: Class I
IP Class: IP20

Energy and approvals

Contains light source of energy class: D
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Sheet steel
Colour: White (RAL 9010, 20% gloss)
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Recessed, Indoor
Module: 600x600 Exposed T-carrier 15/24mm
Connection: 5 pol Winsta / Terminal block

Dimensions

Length (mm) L: 595
Width (mm) W: 595
Height (mm) H: 126
Weight (kg) gross/net: 4.8 / 4.6

Packaging

Packing dimensions (mm): 635 x 625 x 125

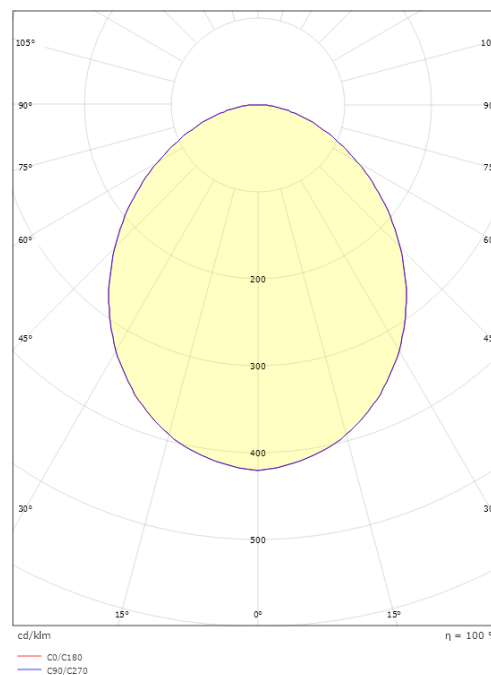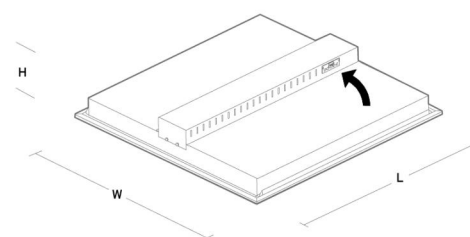

5 7 0 3 8 2 1 1 7 0 3 0 7