

Namsen 600 White w/ 2 x outlet 920lm 3000K Ra>80 DALI-2 / Push Dim

Article code: 112031
EAN: 7021981120313



Electrical

System wattage: 12W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 44, B16: 71, C10: 44, C16: 71

Light technic

Type of light source: LED
Luminous flux: 920lm
Efficacy: 77 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B50>50,000
Light distribution: Direct
Optic: Opal
UGR: UGR<28
Photobiological safety: RG 0

Control/Dimming

Type: DALI-2 / Push Dim

Protection

Luminaire class: Class I
IK Class: IK08
IP Class: IP20

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Steel
Colour: White
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Surface, Indoor
Module: 600
Connection: Screwless terminal block

Dimensions

Length (mm) L: 635
Width (mm) W: 69
Height (mm) H: 46
Weight (kg) gross/net: 1.44 / 1.1

Packaging

Packing dimensions (mm): 645 x 75 x 55

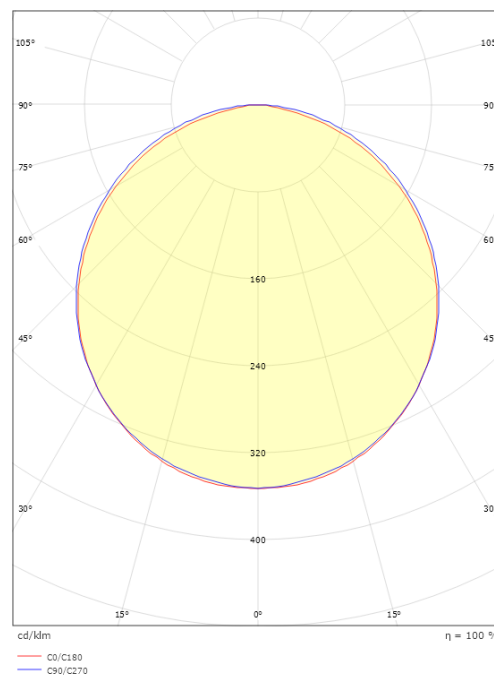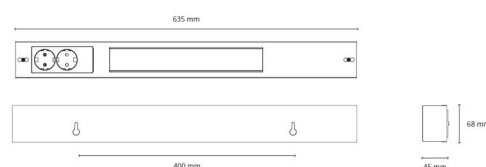

7 0 2 1 9 8 1 1 2 0 3 1 3