

Tysnes 66



Tysnes 66 1500 Grey 6720lm 3000K Ra>80 On/Off

Article code: 120065
EAN: 7021981200657



Electrical

System wattage: 43W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 14, B16: 23, C10: 22, C16: 36

Light technic

Type of light source: LED
Luminous flux: 6720lm
Efficacy: 156 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90>50,000
Light distribution: Direct
Optic: Opal
Beam angle: 117°
Photobiological safety: RG 0

Control/Dimming

Type: On/Off

Protection

Luminaire class: Class I
IK Class: IK10
IP Class: IP66
Fire protection class: 850°C - 30s

Materials and finish

Housing: UV-stabilized polycarbonate
Colour: Grey
Optics: UV-stabilized polycarbonate

Mounting/Connection



Mounting: Surface, Indoor
Module: 1500
Connection: 3-pole screwless terminal block with 3x2,5mm² through wiring

Dimensions

Length (mm) L: 1500
Width (mm) W: 85
Height (mm) H: 80
Weight (kg) gross/net: 1.95 / 1.75

Packaging

Packing dimensions (mm): 1525 x 85 x 90

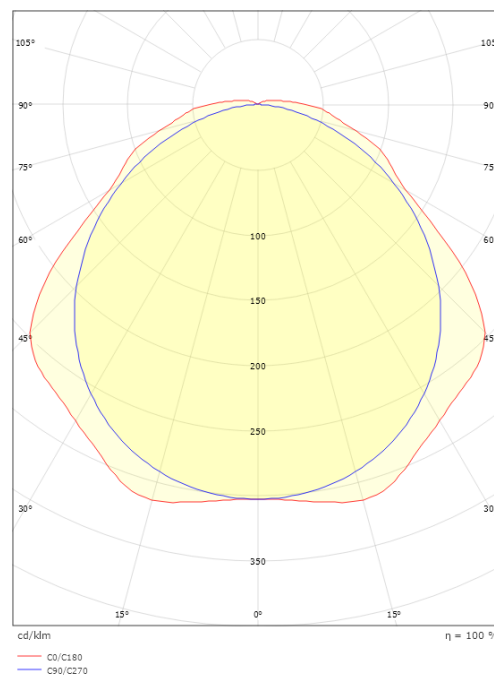

7 0 2 1 9 8 1 2 0 0 6 5 7