

Sense Basic 300x600



Sense Basic 300x600 White 2220lm 4000K Ra>80 On/Off

Article code: 212147
EAN: 7021982121470



Electrical

System wattage: 20W
Max. luminaires per circuit breaker: B10: 38, B16: 60, C10: 57, C16: 91

Light technic

Type of light source: LED
Luminous flux: 2220lm
Efficacy: 111 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Light distribution: Direct
Optic: Opalprism
UGR: UGR<22
Visible flicker (PstLM): 0.17
Stroboscopic flicker (SVM): 0.02

Control/Dimming

Type: On/Off

Protection

Luminaire class: Class II
IK Class: IK06
IP Class: IP20

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Steel
Colour: White smooth (Ral 9016 gloss 30)
Optics: Acrylic (PMMA)

Mounting/Connection


Mounting: Indoor
Module: 300x600
Connection: 3 pol Linect / screwless terminal block

Dimensions

Length (mm) L: 595
Width (mm) W: 295
Height (mm) H: 36
Depth (D): 36
Weight (kg) gross/net: 2.105 / 1.3

Packaging

Packing dimensions (mm): 690 x 360 x 90

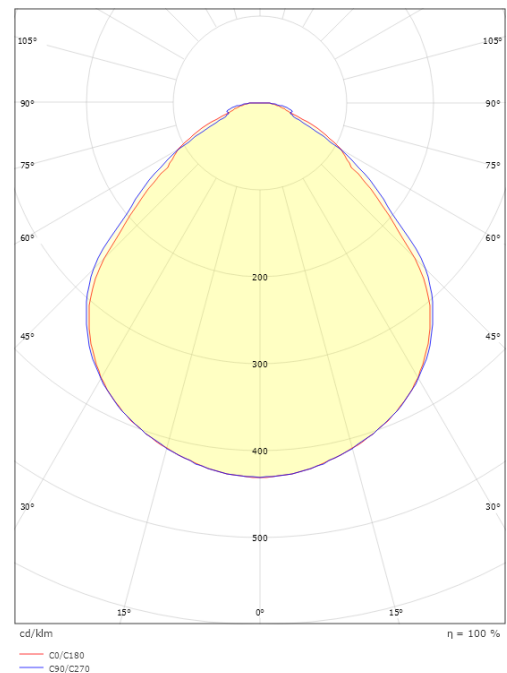

7 0 2 1 9 8 2 1 2 1 4 7 0