

# Sense Basic



## Sense Basic 600x600 White Incl driver 3760lm 3000K Ra>80 On/Off

Article code: 212185  
EAN: 7021982121852  
Replaces: 212213



### Electrical

System wattage: 31W  
Voltage: 220-240V  
Max. luminaires per circuit breaker: B10: 15, B16: 25, C10: 24, C16: 40

### Light technic

Type of light source: LED  
Luminous flux: 3760lm  
Efficacy: 121 lm/W  
Colour temperature: 3000K  
Colour rendering (Ra): Ra>80  
MacAdams factor: SDCM: 3  
Lifetime: L80/B20>100,000  
Light distribution: Direct  
Optic: Opalprism  
UGR: UGR<19

### Control/Dimming

Type: On/Off

### Protection

Luminaire class: Class II SELV  
IP Class: IP20

### Energy and approvals

Contains light source of energy class: C  
Breeam: Fulfils Hea 01 for flicker free lighting

### Materials and finish

Housing: Steel  
Colour: White smooth (Ral 9016 gloss 30)  
Optics: Acrylic (PMMA)

### Mounting/Connection



Mounting: Recessed, Indoor  
Module: 600x600  
Connection: Screwless terminal block

### Dimensions

Length (mm) L: 595  
Width (mm) W: 595  
Height (mm) H: 36  
Depth (D): 36  
Weight (kg) gross/net: 2.925 / 2.4

### Packaging

Packing dimensions (mm): 700 x 635 x 57.5  
Number per pack: 4

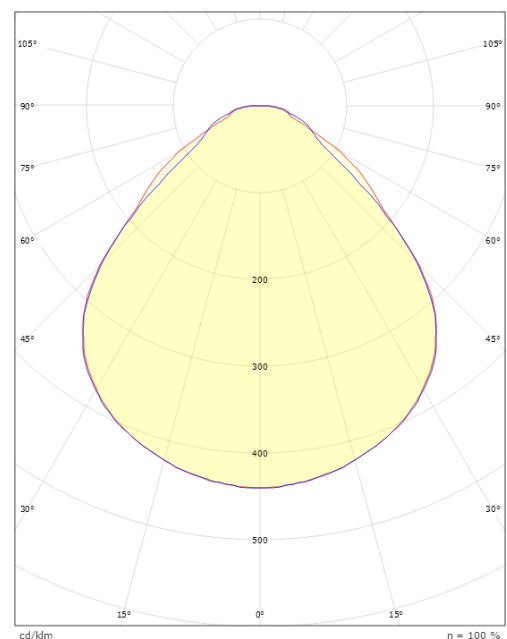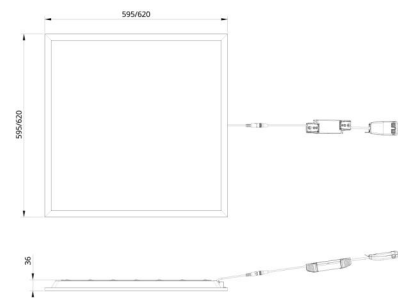

cd/klm  
C0/C180  
C90/C270

$\eta = 100\%$



7 0 2 1 9 8 2 1 2 1 8 5 2