

Sense Round TW



Sense TW White 320 IsoSafe 1610lm 2700-6500K Ra>80 TW DALI Type 8

Article code: 212304
EAN: 7021982123047



Electrical

System wattage: 19W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 10, B16: 16, C10: 16, C16: 26

Light technic

Type of light source: LED
Luminous flux: 1610lm
Efficacy: 85 lm/W
Colour temperature: 2700-6500K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100.000 (50.000 as IsoSafe)
Lifetime: L90>50,000
Light distribution: Direct
Optic: Opal
UGR: UGR<22
Photobiological safety: RG 0

Control/Dimming

Type: TW DALI Type 8

Protection

Luminaire class: Class II SELV
IK Class: IK08
IP Class: IP40/IP20

Energy and approvals

Contains light source of energy class: E
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: White smooth (Ral 9016 gloss 30)
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Recessed, Indoor

Dimensions

Diameter (mm) D: 320
Cut-out (mm): 285
Ceiling void depth (mm): 25
Weight (kg) gross/net: 1.489 / 1.265

Packaging

Packing dimensions (mm): 325 x 325 x 65

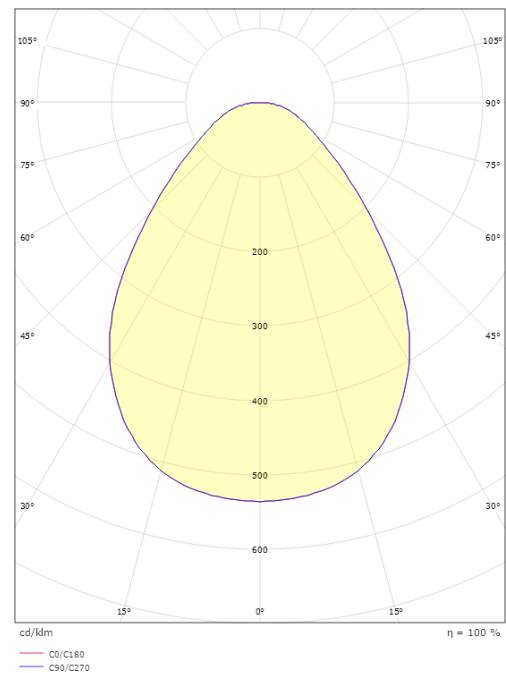

7 0 2 1 9 8 2 1 2 3 0 4 7