

Sense Surface



Sense Surface 640x200 White 2030lm 4000K Ra>80 Trailing edge

Article code: 212326
EAN: 7021982123269



Electrical

Wattage: 18W
System wattage: 18W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 43, B16: 69, C10: 43, C16: 69

Light technic

Type of light source: LED
Luminous flux: 2030lm
Efficacy: 113 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Light distribution: Direct
Optic: Opalprism
Visible flicker (PstLM): 0.07
Stroboscopic flicker (SVM): 0.04

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II
IK Class: IK10
IP Class: IP20

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: White
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Surface, Indoor
Module: 640x200
Connection: Screwless terminal block

Dimensions

Length (mm) L: 642
Width (mm) W: 202
Height (mm) H: 45
Weight (kg) gross/net: 2.88 / 2.6

Packaging

Packing dimensions (mm): 660 x 225 x 65

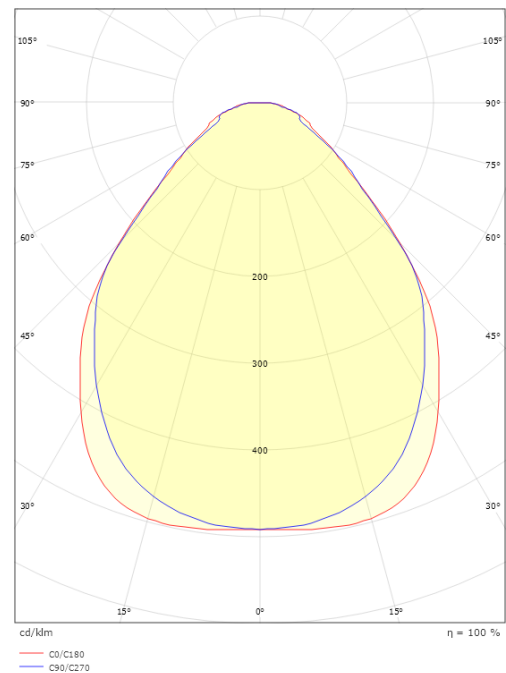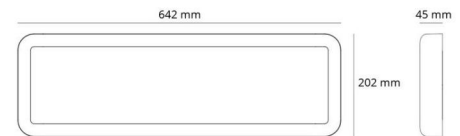

7 0 2 1 9 8 2 1 2 3 2 6 9