

# Inspire R TW



## Inspire R White 300 1080lm (@6500K) 2700-6500K Ra>90 TW DALI Type 8

Article code: 212451  
EAN: 7021982124518



### Electrical

System wattage: 17W  
Voltage: 220-240V  
Max. luminaires per circuit breaker: B10: 22, B16: 36, C10: 37, C16: 61

### Light technic

Type of light source: LED  
Luminous flux: 1080lm (@6500K)  
Efficacy: 64 lm/W  
Colour temperature: 2700-6500K  
Colour rendering (Ra): Ra>90  
MacAdams factor: SDCM: 2  
Lifetime: L90/B10>100,000  
Light distribution: Direct  
Optic: Lens  
Beam angle: 55°  
Photobiological safety: RG 1

### Control/Dimming

Type: TW DALI Type 8

### Protection

Luminaire class: Class II SELV  
IP Class: IP20

### Energy and approvals

Contains light source of energy class: E  
Breeam: Fulfils Hea 01 for flicker free lighting

### Materials and finish

Housing: Aluminium  
Colour: White (RAL 9003)

### Mounting/Connection




Mounting: Recessed, Indoor  
Module: Recessed  
Connection: Screwless terminal block

### Dimensions

Length (mm) L: 303  
Width (mm) W: 62  
Height (mm) H: 40  
Weight (kg) gross/net: 0.78 / 0.515

### Packaging

Packing dimensions (mm): 317 x 135 x 50

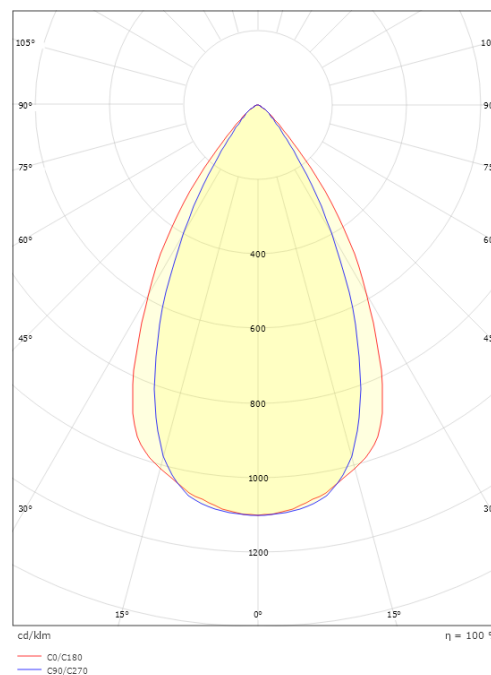

7 0 2 1 9 8 2 1 2 4 5 1 8