

Sense 600x600 Round



Sense Pro Round 600x600 White 4050lm 4000K Ra>80 Trailing edge

Article code: 212675+820494
EAN: 7021982126758+7021988204948



Electrical

System wattage: 38W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 18, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
Luminous flux: 4050lm
Efficacy: 107 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90>50,000
Light distribution: Direct
Optic: Opalprism
Beam angle: 110°

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class III
IK Class: IK10
IP Class: IP40/IP20

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish



Housing: Aluminium
Colour: White
Optics: Acrylic (PMMA)

Mounting/Connection

Mounting: Recessed, Indoor
Module: Exposed T-carrier 15/24mm
Connection: Quick connector

Dimensions

Length (mm) L: 597
Width (mm) W: 597
Height (mm) H: 11
Weight (kg) gross/net: 3.761

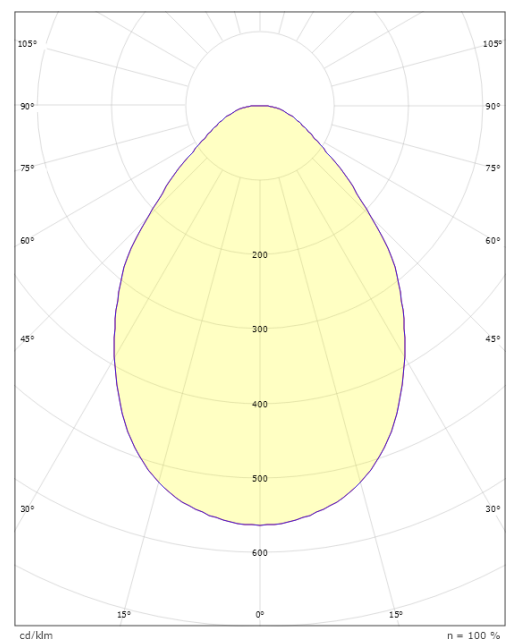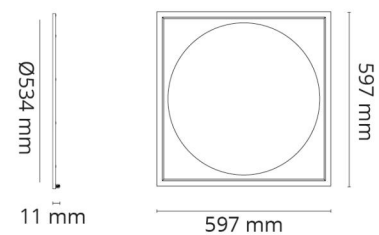

cd/klm
— C0/C180
— C90/C270

$\eta = 100\%$



7021982126758+7021988204948