

Disc 360



Disc 360 White 2510lm 2700K Ra>80 Trailing edge

Article code: 606216
EAN: 7021986062168




Electrical

System wattage: 21W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
Light source included: Yes
Luminous flux: 2510lm
Efficacy: 120 lm/W
Colour temperature: 2700K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90>50,000
Light distribution: Direct
Optic: Opalprism
Beam angle: 85°
UGR: UGR<22
Visible flicker (PstLM): 0,09
Stroboscopic flicker (SVM): 0,05



Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II
IK Class: IK10
IP Class: IP20

Energy and approvals

Contains light source of energy class: D
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: White
Optics: Acrylic (PMMA)

Mounting/Connection


Mounting: Surface, Indoor
Connection: Screwless terminal block

Dimensions

Height (mm) H: 57
Diameter (mm) D: 360
Weight (kg) gross/net: 2.7 / 2.5

Packaging

Packing dimensions (mm): 375 x 380 x 60

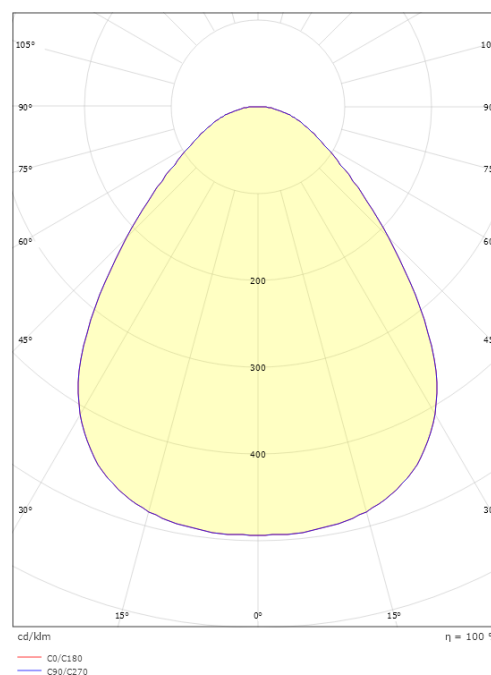

7 0 2 1 9 8 6 0 6 2 1 6 8