

Disc Connect



Disc 760 White 5990lm/6340lm 3000/4000K Ra>80 Connect

Article code: 606234
EAN: 7021986062342



Electrical

Wattage: 48W/48W
System wattage: 48W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 17, B16: 27, C10: 28, C16: 45

Light technic

Type of light source: LED
Luminous flux: 5990lm/6340lm
Efficacy: 125/132lmW
Colour temperature: 3000/4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90>50,000
Light distribution: Direct
Optic: Opalprism
Beam angle: 88°

Control/Dimming

Type: Connect

Protection

Luminaire class: Class II
IK Class: IK10
IP Class: IP20

Energy and approvals

Contains light source of energy class: C/D
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Steel
Colour: White
Optics: Acrylic (PMMA)

Mounting/Connection



Module: 760
Connection: Screwless terminal block

Dimensions


Height (mm) H: 55
Diameter (mm) D: 760
Weight (kg) gross/net: 11.1 / 10.7

Packaging

Packing dimensions (mm): 775 x 775 x 63

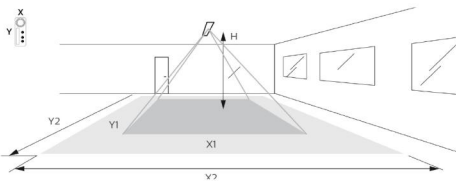

H (m)	Minor movements		Major movements	
	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
2.4	1.9	2.9	2.9	4.3
3	2.4	3.6	3.6	5.4

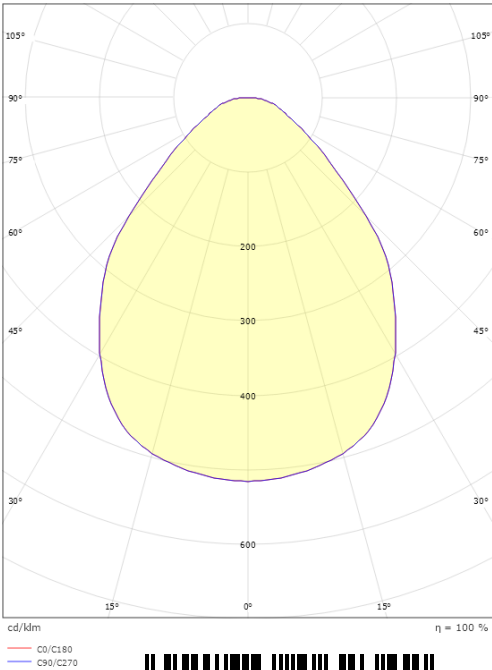

7 0 2 1 9 8 6 0 6 2 3 4 2