

Arena ECO 1200 Wide 7100lm 4000K Ra>80 On/Off

Article code: 607008
EAN: 7021986070088



Electrical

System wattage: 46W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 12, B16: 19, C10: 19, C16: 32
Leakage current (mA): 0.52

Light technic

Type of light source: LED
Luminous flux: 7100lm
Efficacy: 154 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90>50,000
Light distribution: Direct
Beam angle: 90°
Photobiological safety: RG 1

Control/Dimming

Type: On/Off

Protection

Luminaire class: Class I
IK Class: IK10
IP Class: IP23

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfil Hea 01 for flicker free lighting

Materials and finish

Housing: Steel
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Surface, Indoor
Module: 1200
Connection: 5-pole screwless terminal block with 5x2,5mm2 through wiring

Dimensions

Length (mm) L: 1184
Width (mm) W: 134
Height (mm) H: 72
Weight (kg) gross/net: 3.6 / 3.15

Packaging

Packing dimensions (mm): 1192 x 76 x 143

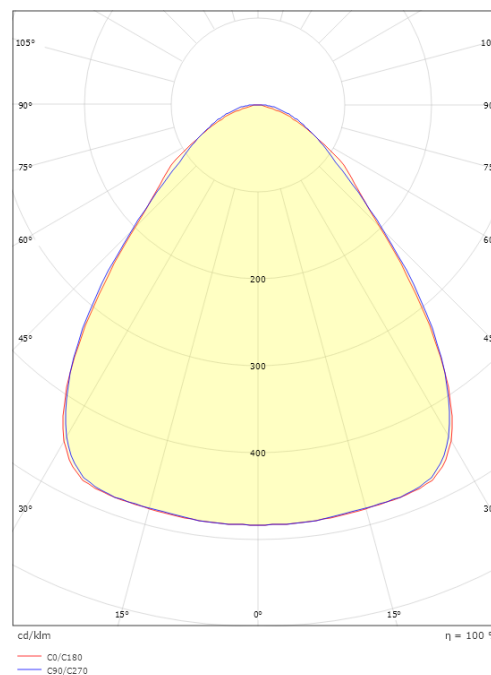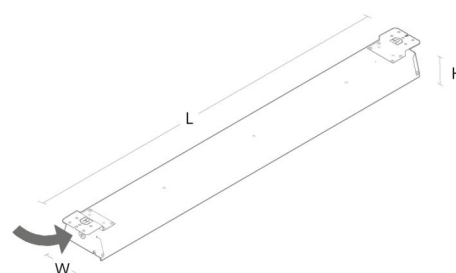

7 0 2 1 9 8 6 0 7 0 0 8 8