

Piano 2000 White 1680lm 3000K Ra>80 Trailing edge

Article code: 621876
EAN: 7021986218763



Electrical

System wattage: 14W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
Luminous flux: 1680lm
Efficacy: 120 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L70/B50>100,000
Light distribution: Direct/Indirect
Optic: Opal
Beam angle: 110°
Photobiological safety: RG 0

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class I
IK Class: IK10
IP Class: IP65
Fire protection class: 850°C - 30s

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfil Hea 01 for flicker free lighting
BVB: Yes
Sunda Hus: C+

Materials and finish

Housing: Aluminium
Colour: White (RAL 9003)
Optics: UV-stabilized polycarbonate

Mounting/Connection


Mounting: Surface, Outdoor
Module: 2000
Connection: Screwless terminal block

Dimensions

Height (mm) H: 105
Diameter (mm) D: 340
Weight (kg) gross/net: 2.6 / 2.1

Packaging

Packing dimensions (mm): 352 x 352 x 115

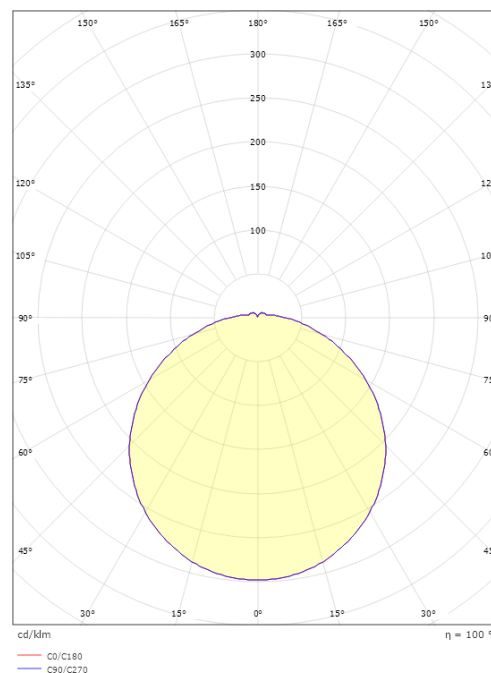

7 0 2 1 9 8 6 2 1 8 7 6 3