

Metro Deco Graphite 380lm 2700K Ra>80 Trailing edge

Article code: 623701
EAN: 7021986237016



Electrical

Wattage: 2x4,5W
System wattage: 9W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 100, B16: 100, C10: 160, C16: 160

Light technic

Type of light source: LED
Socket: GU10
Light source included: Yes
Luminous flux: 380lm
Efficacy: 42 lm/W
Colour temperature: 2700K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 4
Lifetime: L70/B50>40,000
Light distribution: Direct
Optic: Plastic clear
Beam angle: 35°/35°

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II
IK Class: IK08
IP Class: IP65

Energy and approvals

Contains light source of energy class: G
Breeam: Fulfils Hea 01 for flicker free lighting
BVB: Yes
Sunda Hus: C+

Materials and finish

Housing: Aluminium
Colour: Graphite
Optics: UV-stabilized polycarbonate

Mounting/Connection



Mounting: Surface, Outdoor
Connection: Screwless terminal block

Dimensions

Width (mm) W: 90
Height (mm) H: 225
Depth (D): 147
Weight (kg) gross/net: 1.33 / 1.279

Packaging

Packing dimensions (mm): 235 x 160 x 100

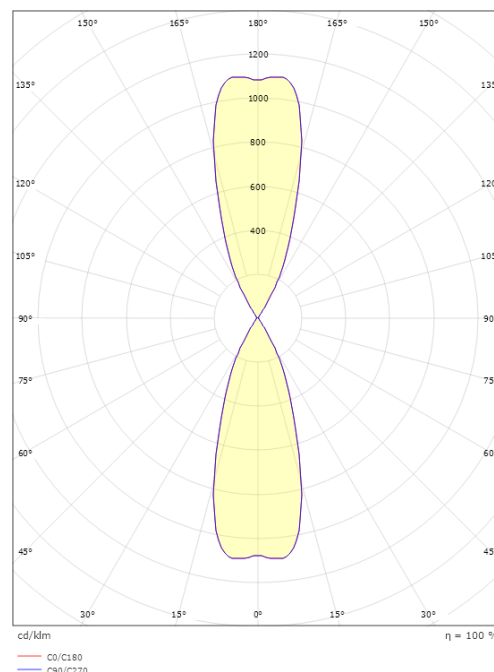

7 0 2 1 9 8 6 2 3 7 0 1 6