

Hovden Sign



SG Hovden Sign Graphite 1120lm 3000K Ra>80 Trailing edge

Article code: 630044
EAN: 7021986300444
Replaces: 614010



Electrical

System wattage: 12W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 47, B16: 67, C10: 47, C16: 67

Light technic

Type of light source: LED
Luminous flux: 1120lm
Efficacy: 93 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>50,000
Light distribution: Direct
Optic: Lens
Beam angle: 70°

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class I
IK Class: IK04
IP Class: IP67

Energy and approvals

Contains light source of energy class: F
Breeam: Fulfils Hea 01 for flicker free lighting
ULOR (Yes, up to 32° tilt angle

Materials and finish

Housing: Aluminium
Colour: Graphite
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Surface, Outdoor
Cable: Cable 1m

Dimensions

Length (mm) L: 820
Width (mm) W: 125
Height (mm) H: 100
Weight (kg) gross/net: 1.733 / 1.575

Packaging

Packing dimensions (mm): 850 x 130 x 100

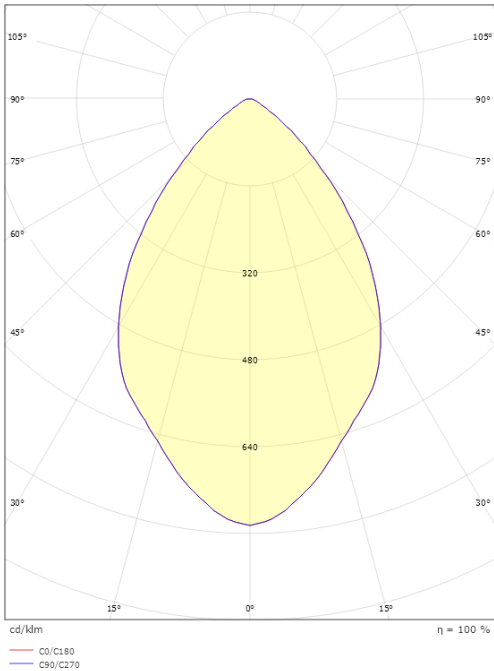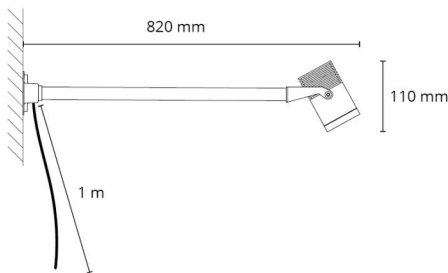

7 0 2 1 9 8 6 3 0 0 4 4 4