

Artes Mini Graphite 400lm 4000K Ra>80 Trailing edge

Article code: 641745
EAN: 7021986417456



Electrical

System wattage: 8W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 90, B16: 150, C10: 90, C16: 150

Light technic

Type of light source: LED
Luminous flux: 400lm
Efficacy: 50 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L70/B50>90.000
Lifetime: L80/B10>60,000
Optic: Lens
Beam angle: 60°
Visible flicker (PstLM): 0,06
Stroboscopic flicker (SVM): 0,3

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II
IP Class: IP44

Energy and approvals

Contains light source of energy class: E
ULOR (Yes, for direct only

Materials and finish

Housing: Aluminium
Optics: UV-stabilized polycarbonate

Mounting/Connection



Mounting: Surface, Indoor / Outdoor
Connection: Screwless terminal block

Dimensions

Length (mm) L: 86
Width (mm) W: 100
Height (mm) H: 86
Weight (kg) gross/net: 0.555 / 0.508

Packaging

Packing dimensions (mm): 90 x 115 x 95

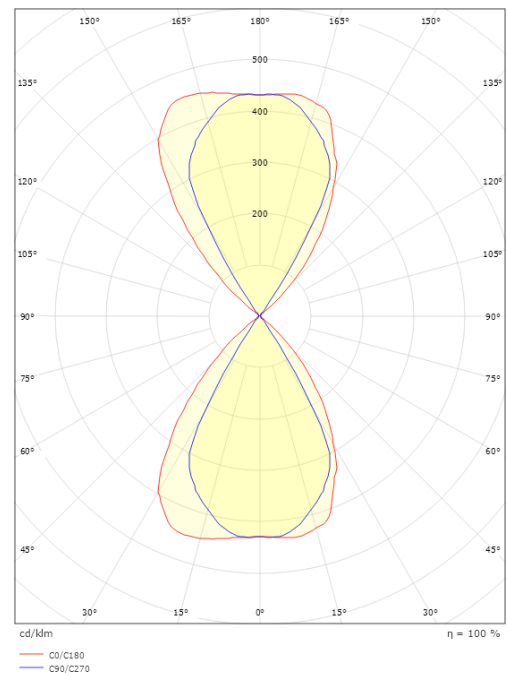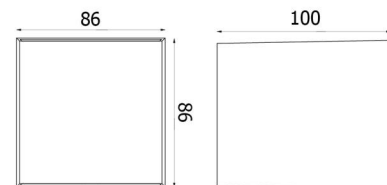

7 0 2 1 9 8 6 4 1 7 4 5 6