

# Sidewalk



## Sidewalk 2000 Graphite 1500lm 4000K Ra>80 Sensor

Article code: 643833  
EAN: 7021986438338



### Electrical

System wattage: 14W  
Voltage: 220-240V  
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

### Light technic

Type of light source: LED  
Luminous flux: 1500lm  
Efficacy: 107 lm/W  
Colour temperature: 4000K  
Colour rendering (Ra): Ra>80  
MacAdams factor: SDCM: 3  
Lifetime: L70/B50>100,000  
Light distribution: Direct  
Optic: Opal  
Beam angle: 110°

### Control/Dimming

Type: Sensor

### Protection

Luminaire class: Class I  
IK Class: IK10  
IP Class: IP65  
Fire protection class: 850°C - 30s

### Energy and approvals

Contains light source of energy class: D  
Breeam: Fulfils Hea 01 for flicker free lighting

### Materials and finish

Housing: Aluminium  
Colour: Graphite  
Optics: UV-stabilized polycarbonate

### Mounting/Connection


Mounting: Surface, Indoor / Outdoor  
Module: 2000  
Connection: Screwless terminal block

### Dimensions


Length (mm) L: 300  
Width (mm) W: 300  
Height (mm) H: 87  
Weight (kg) gross/net: 3.1 / 2.28

### Packaging

Packing dimensions (mm): 310 x 310 x 100



| Sensor settings |   |   |   |   |        |
|-----------------|---|---|---|---|--------|
|                 | 1 | 1 | 2 | 3 | 4      |
|                 | 1 | 1 | 1 | 1 | 100%   |
|                 | 2 | 2 | 2 | 2 | 75%    |
|                 | 3 | 3 | 3 | 3 | 50%    |
|                 | 4 | 4 | 4 | 4 | 25%    |
|                 | 1 | 1 | 2 | 3 | 4      |
|                 | 1 | 1 | 1 | 1 | 5s     |
|                 | 2 | 2 | 2 | 2 | 30s    |
|                 | 3 | 3 | 3 | 3 | 1 min  |
|                 | 4 | 4 | 4 | 4 | 5 min  |
|                 | 1 | 1 | 2 | 3 | 4      |
|                 | 1 | 1 | 1 | 1 | 2 Lux  |
|                 | 2 | 2 | 2 | 2 | 5 Lux  |
|                 | 3 | 3 | 3 | 3 | 10 Lux |
|                 | 4 | 4 | 4 | 4 | 30 Lux |
|                 | 5 | 5 | 5 | 5 | 50 Lux |
|                 | 6 | 6 | 6 | 6 | Off    |

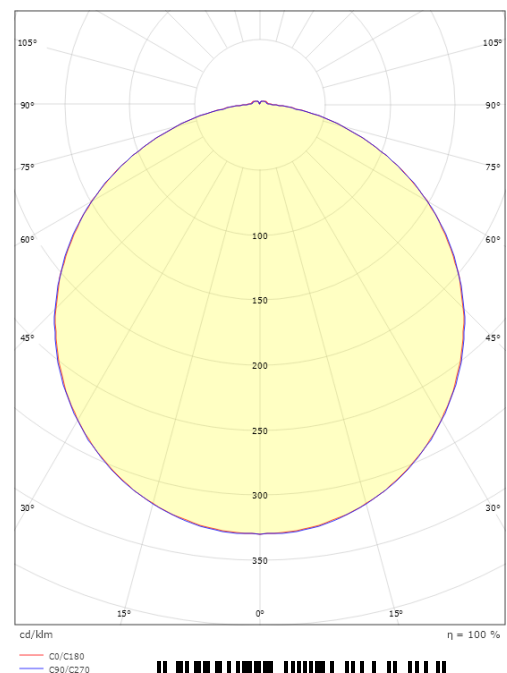

7 0 2 1 9 8 6 4 3 8 3 3 8