

# Mirac LED



## Mirac LED 622x622 White 3 line 4500lm 4000K Ra>80 On/Off

Article code: 8246085894  
EAN: 5703821170192



• = This article is produced by order, with an expected delivery time of 3-4 weeks.



### Electrical

System wattage: 37W  
Voltage: 220-240V  
Max. luminaires per circuit breaker: B10: 15, B16: 24, C10: 25, C16: 41

### Light technic

Type of light source: LED  
Luminous flux: 4500lm  
Efficacy: 122 lm/W  
Colour temperature: 4000K  
Colour rendering (Ra): Ra>80  
MacAdams factor: SDCM: 3  
Lifetime: L80/B10>50,000  
Light distribution: Direct  
Optic: Double parabolic louvre, satin matt  
UGR: UGR<19

### Control/Dimming

Type: On/Off

### Protection

Luminaire class: Class I  
IP Class: IP20

### Energy and approvals

Contains light source of energy class: D  
Breem: Fulfil Hea 01 for flicker free lighting

### Materials and finish

Housing: Sheet steel  
Colour: White smooth (Ral 9016 gloss 30)  
Optics: Aluminium

### Mounting/Connection




Mounting: Recessed, Indoor  
Module: 622x622 T/L/C  
Connection: 3 pol Winsta / Terminal block

### Dimensions

Length (mm) L: 622  
Width (mm) W: 622  
Height (mm) H: 63  
Weight (kg) gross/net: 6 / 5.8

### Packaging

Packing dimensions (mm): 630 x 619 x 67

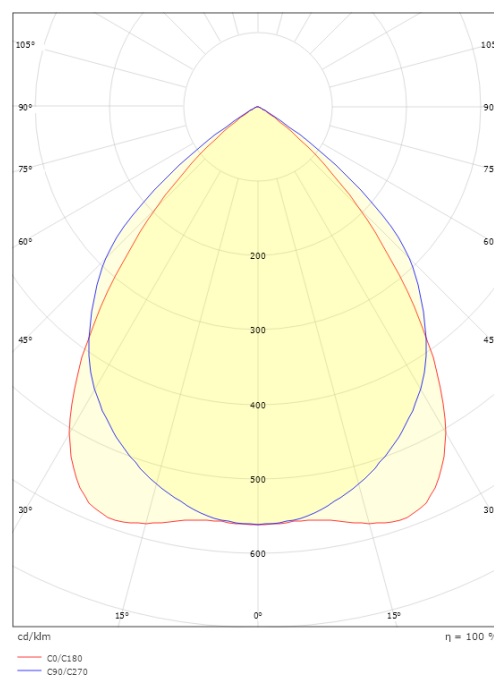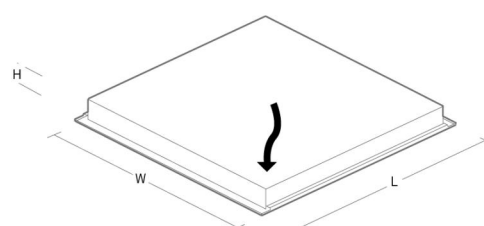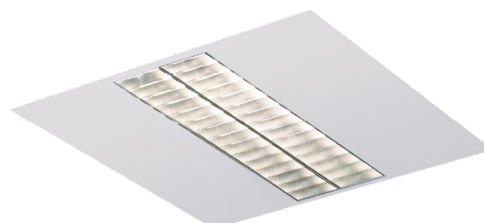

5 7 0 3 8 2 1 1 7 0 1 9 2