

Place Grey 2530lm 4000K Ra>80 On/Off

Article code: 8246087407
EAN: 5703821168083



Electrical

System wattage: 21W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 32, B16: 50, C10: 52, C16: 85

Light technic

Type of light source: LED
Luminous flux: 2530lm
Efficacy: 120 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L90/B10>50,000
Lifetime: L80/B10>100,000
Light distribution: Direct

Control/Dimming

Type: On/Off

Protection

Luminaire class: Class II
IK Class: IK10
IP Class: IP66
Surge protection: Integrated (min. 4 kV)

Energy and approvals

Contains light source of energy class: B
BVB: Yes
Sunda Hus: C+

Materials and finish

Housing: Die-cast aluminium
Colour: Grey (structure 2150 sablé)
Optics: Polycarbonat (PC)

Mounting/Connection



Mounting: Post - top (Ø60mm), Outdoor
Cable: Cable 2x1mm² 6m
Wind projected area: 0,0775m² - Max 10 kg

Dimensions

Height (mm) H: 291
Diameter (mm) D: 600
Weight (kg) gross/net: 7.4 / 7.2

Packaging

Packing dimensions (mm): 625 x 625 x 300

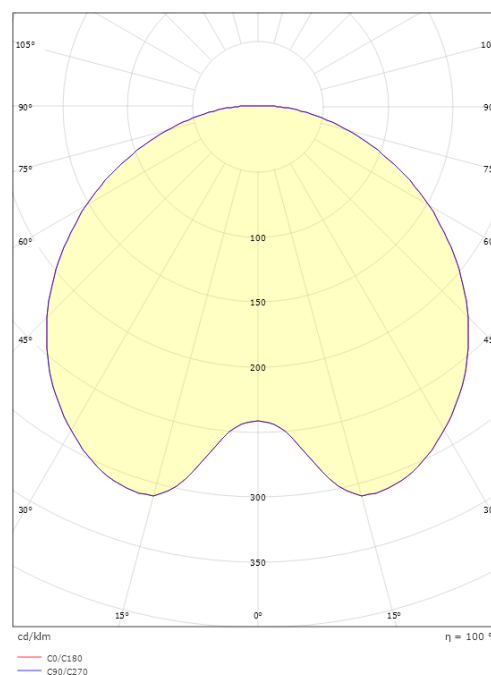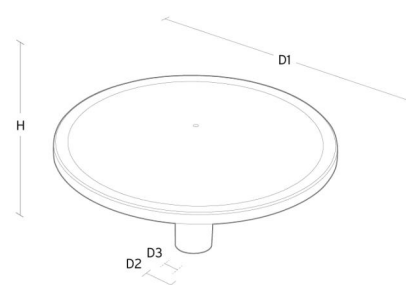

5 7 0 3 8 2 1 1 6 8 0 8 3