EcoLine Office

sg

EcoLine Office 1200 White 2350lm 3000K Ra>80 On/Off

Article code: 8246089557
EAN: 5703821176163

• = *This article is produced by order, with an expected delivery time of 3-4 weeks.*

CE ⏚ IP20 EL ⌂

Electrical
Wattage: 18W
System wattage: 18W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

Light technic
Type of light source: LED
Luminous flux: 2350lm
Efficacy: 131 lm/W
Colour temperature: 3000K
Colour rendering (Ra):   Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B10>50,000
Light distribution: Direct
Optic: Double parabolic louvre, satin matt
UGR: UGR<19

Control/Dimming
Type: On/Off

Protection
Luminaire class: Class I
IP Class: IP20

Energy and approvals
Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish
Housing: Sheet steel
Colour: White (Pure white, 25% gloss)
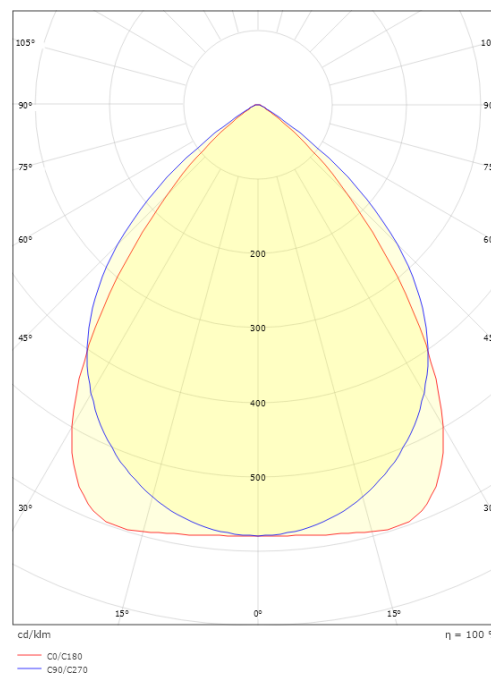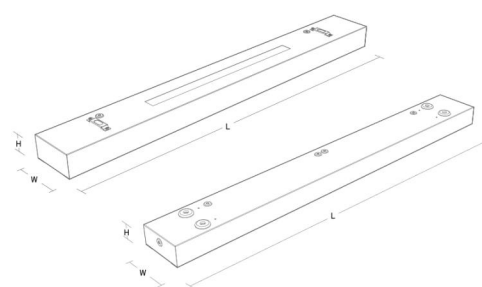Optics: Aluminium

Mounting/Connection
Mounting: Suspended or surface, Indoor
Module: 1200
Connection: Screwless terminal block

Dimensions
Length (mm) L: 1200
Width (mm) W: 142
Height (mm) H: 63
Weight (kg) gross/net: 5.7 / 5.5

Packaging
Packing dimensions (mm):   1215 x 146 x 68

cd/klm   η = 100 %
— C0/C180
— C90/C270