

Junistar Exclusive In/Outdoor Graphite 680lm 3000K Ra>95 Trailing edge

Article code: 903304
EAN: 7021989033042



Electrical

Wattage: 9W
System wattage: 10.9W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
Luminous flux: 680lm
Efficacy: 62 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>95
MacAdams factor: SDCM: 2
Lifetime: L90/B10>100,000
Light distribution: Direct
Optic: Reflector
Beam angle: 42°
UGR: UGR<25

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II SELV
IP Class: IP44/IP20

Energy and approvals

Contains light source of energy class: F
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Graphite
Optics: Tempered glass

Mounting/Connection



Mounting: Recessed, Indoor / Outdoor
Connection: Screwless terminal block

Dimensions

Length (mm) L: 121
Width (mm) W: 94
Height (mm) H: 55
Cut-out (mm): 83
Ceiling void depth (mm): 53
Distance to flammable materials: 10mm
Weight (kg) gross/net: 0.38 / 0.38

Packaging

Packing dimensions (mm): 130 x 120 x 90

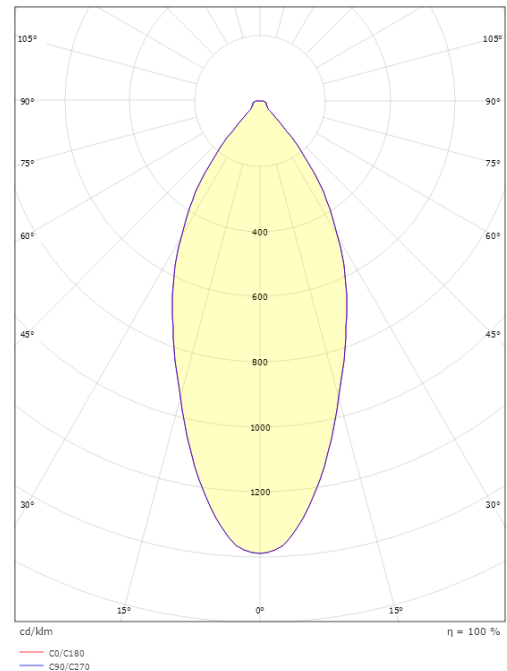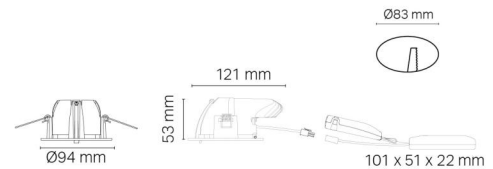

7 0 2 1 9 8 9 0 3 3 0 4 2