


# Facet II



Facet II is a slim, minimalistic luminaire with white powdercoating. With the direct/indirect light and glare-free optics in PMMA it is perfect for classrooms or open offices where light comfort is very important. The wall bracket (accessory) makes it a perfect choice for blackboard lighting. Plug-and-play solution for quick installation.

## Product- and environment images

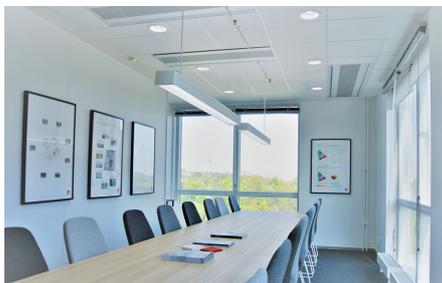

# Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>8241000572  <b>Facet II 1700 White 8450lm 3000K</b>  <b>Ra&gt;80 DALI-2</b>  <b>52W LED</b>            163 lm/W SDCM:3            L80/B10&gt;100,000, L94&gt;50,000            Direct/Indirect 58/42%, Lens C,            prismatic Conical</p>	<b>Class I</b> <b>IP20</b>	DALI-2	Suspended, Indoor 2x2m wire kit w/loop M4 Cable 5x0,75mm <sup>2</sup> 2,5m white	L1756 x W112 x H80
 <p>8246090313  <b>Facet II 1200 White 4500lm 3000K</b>  <b>Ra&gt;80 DALI-2</b>  <b>29W LED</b>            155 lm/W SDCM:3            L80/B10&gt;100,000, L94&gt;50,000            Direct/Indirect 65/35%, Lens C,            prismatic Conical</p>	<b>Class I</b> <b>IP20</b>	DALI-2	Suspended, Indoor 2x2m wire kit w/loop M4 Cable 5x0,75mm <sup>2</sup> 2,5m	L1196 x W112 x H80
 <p>8246090339  <b>Facet II 1700 White 6760lm 3000K</b>  <b>Ra&gt;80 DALI-2</b>  <b>53W LED</b>            128 lm/W SDCM:3            L80/B10&gt;100,000, L94&gt;50,000            Direct/Indirect 30/70%, Lens C,            prismatic Conical</p>	<b>Class I</b> <b>IP20</b>	DALI-2	Suspended, Indoor 2x2m wire kit w/loop M4 Cable 5x0,75mm <sup>2</sup> 2,5m white	L1756 x W112 x H80
 <p>8246090737  <b>Facet II 1200 White 2020lm 3000K</b>  <b>Ra&gt;80 DALI-2</b>  <b>18W LED</b>            112 lm/W SDCM:3            L80/B10&gt;100,000, L94&gt;50,000            Direct/Asymmetric, Linse L, prismatic            linear</p>	<b>Class I</b> <b>IP20</b>	DALI-2	Suspended, Indoor 2x2m wire kit w/loop M4 Cable 5x0,75mm <sup>2</sup> 2,5m white	L1196 x W112 x H80
 <p>8246090326 <span style="color: orange;">●</span>  <b>Facet II 1200 White 2020lm 3000K</b>  <b>Ra&gt;80 On/Off</b>  <b>18W LED</b>            112 lm/W SDCM:3            L80/B10&gt;100,000, L94&gt;50,000            Direct/Asymmetric, Linse L, prismatic            linear</p>	<b>Class I</b> <b>IP20</b>	On/Off	Suspended, Indoor 2x2m wire kit w/loop M4 Cable 3x0,75mm <sup>2</sup> 2,5m w/ Schuko white	L1196 x W112 x H80
 <p>8246090397  <b>Facet II 1200 White 4500lm 3000K</b>  <b>Ra&gt;80 On/Off</b>  <b>29W LED</b>            155 lm/W SDCM:3</p>	<b>Class I</b> <b>IP20</b>	On/Off	Suspended, Indoor 2x2m wire kit w/loop M4 Cable 3x0,75mm <sup>2</sup> 2,5m w/ Schuko white	L1196 x W112 x H80

# Article codes



Article	L80/B10>100,000, L94>50,000	Protection	Control gear	Mounting/Connection	Dimensions
 <p>Direct/Indirect 65/35%, Lens C, prismatic Conical 8246090423</p> <p><b>Facet II 1700 White 6760lm 3000K</b> <b>Ra&gt;80 On/Off</b> <b>53W LED</b> 128 lm/W SDCM:3</p>		<b>Class I</b> <b>IP20</b>	On/Off	Suspended, Indoor 2x2m wire kit w/loop M4 Cable 3x0,75mm <sup>2</sup> 2,5m w/ Schuko white	L1756 x W112 x H80
 <p>8246090410</p> <p><b>Facet II 1200 White 4700lm 4000K</b> <b>Ra&gt;80 DALI-2</b> <b>29W LED</b> 162 lm/W SDCM:3</p>		<b>Class I</b> <b>IP20</b>	DALI-2	Suspended, Indoor 2x2m wire kit w/loop M4 Cable 5x0,75mm <sup>2</sup> 2,5m white	L1196 x W112 x H80
 <p>8246090449</p> <p><b>Facet II 1700 White 7120lm 4000K</b> <b>Ra&gt;80 DALI-2</b> <b>53W LED</b> 134 lm/W SDCM:3</p>		<b>Class I</b> <b>IP20</b>	DALI-2	Suspended, Indoor 2x2m wire kit w/loop M4 Cable 5x0,75mm <sup>2</sup> 2,5m white	L1756 x W112 x H80
 <p>8246090740</p> <p><b>Facet II 1200 White 2120lm 4000K</b> <b>Ra&gt;80 DALI-2</b> <b>18W LED</b> 118 lm/W SDCM:3</p>		<b>Class I</b> <b>IP20</b>	DALI-2	Suspended, Indoor 2x2m wire kit w/loop M4 Cable 5x0,75mm <sup>2</sup> 2,5m white	L1196 x W112 x H80
 <p>8246090384</p> <p><b>Facet II 1200 White 2120lm 4000K</b> <b>Ra&gt;80 On/Off</b> <b>18W LED</b> 118 lm/W SDCM:3</p>		<b>Class I</b> <b>IP20</b>	On/Off	Suspended, Indoor 2x2m wire kit w/loop M4 Cable 3x0,75mm <sup>2</sup> 2,5m w/ Schuko white	L1196 x W112 x H80

# Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>8246090407  <b>Facet II 1200 White 4700lm 4000K</b>  <b>Ra&gt;80 On/Off</b>  <b>29W LED</b>            162 lm/W SDCM:3            L80/B10&gt;100,000, L94&gt;50,000            Direct/Indirect 65/35%, Lens C,            prismatic Conical</p>	<b>Class I</b> <b>IP20</b>	On/Off	Suspended, Indoor 2x2m wire kit w/loop M4 Cable 3x0,75mm <sup>2</sup> 2,5m w/ Schuko white	L1196 x W112 x H80
 <p>8246090436 •  <b>Facet II 1700 White 7120lm 4000K</b>  <b>Ra&gt;80 On/Off</b>  <b>53W LED</b>            134 lm/W SDCM:3            L80/B10&gt;100,000, L94&gt;50,000            Direct/Indirect 30/70%, Lens C,            prismatic Conical</p>	<b>Class I</b> <b>IP20</b>	On/Off	Suspended, Indoor 2x2m wire kit w/loop M4 Cable 3x0,75mm <sup>2</sup> 2,5m w/ Schuko white	L1756 x W112 x H80
<b>Accessories</b>				
 <p>212198  <b>Black T-carrier ceiling bracket</b></p>				L30 x W20 x H5
 <p>212255  <b>T-profil White Suspension Rail 600mm</b></p>				L596 x W35 x H17
 <p>8249044007  <b>Facet II White Wall bracket kit</b></p>				L490 x W70 x H70
 <p>820307  <b>Emergency battery 3 Hours 3.0Ah - Model No: B093</b></p>				L137 x W27 x H27
 <p>8249042724 •  <b>Ceiling box 2x2m Wire kit</b></p>				L180 x W120 x H10

• = This article is produced by order, with an expected delivery time of 3-4 weeks.