

Junistar Lux Square




Single or double downlight for indoor use. Junistar Lux Square emits a harmonious, flicker-free light with excellent colour rendering. Its patented, adjustable 30-degree tilt function in all directions. It includes a junction box that provides strain relief for several types of cables, as well as fixation for plastic tubing.

Junistar Lux Square



Product- and environment images

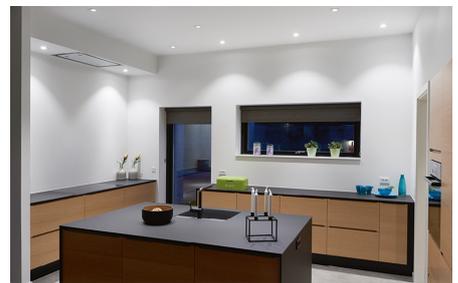

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>902605 Junistar Lux Square Black 580lm 2700K Ra 98 DALI-2 8W LED 73 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP44/IP20	DALI-2	Recessed, Indoor 5 pol Linect / screwless terminal block	L95 x W95 x H50
 <p>902614 Junistar Lux Square Black 2X 1160lm 2700K Ra 98 DALI-2 17W LED 68 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP44/IP20	DALI-2	Recessed, Indoor 5 pol Linect / screwless terminal block	L175 x W95 x H50
 <p>902587 Junistar Lux Square Black 580lm 2700K Ra 98 Trailing edge 8W LED 73 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP44/IP20	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	L95 x W95 x H50
 <p>902596 Junistar Lux Square Black 2X 1160lm 2700K Ra 98 Trailing edge 17W LED 68 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP44/IP20	Trailing edge	Recessed, Indoor Screwless terminal block	L175 x W95 x H50
 <p>902584 Junistar Lux Square Brushed steel 580lm 2700K Ra 98 Trailing edge 8W LED 73 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP44/IP20	Trailing edge	Recessed, Indoor Screwless terminal block	L95 x W95 x H50
 <p>902593 Junistar Lux Square Brushed steel 2X 1160lm 2700K Ra 98 Trailing edge 17W LED 68 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP44/IP20	Trailing edge	Recessed, Indoor Screwless terminal block	L175 x W95 x H50

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>902599 Junistar Lux Square White 580lm 2700K Ra 98 DALI-2 8W LED 73 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP44/IP20	DALI-2	Recessed, Indoor 5 pol Linect / screwless terminal block	L95 x W95 x H50
 <p>902608 Junistar Lux Square White 2X 1160lm 2700K Ra 98 DALI-2 17W LED 68 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP44/IP20	DALI-2	Recessed, Indoor 5 pol Linect / screwless terminal block	L175 x W95 x H50
 <p>902581 Junistar Lux Square White 580lm 2700K Ra 98 Trailing edge 8W LED 73 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP44/IP20	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	L95 x W95 x H50
 <p>902590 Junistar Lux Square White 2X 1160lm 2700K Ra 98 Trailing edge 17W LED 68 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP44/IP20	Trailing edge	Recessed, Indoor Screwless terminal block	L175 x W95 x H50
 <p>902606 Junistar Lux Square Black 590lm 3000K Ra 98 DALI-2 8W LED 74 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP44/IP20	DALI-2	Recessed, Indoor 5 pol Linect / screwless terminal block	L95 x W95 x H50
 <p>902615 Junistar Lux Square Black 2X 1180lm 3000K Ra 98 DALI-2 17W LED 69 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP44/IP20	DALI-2	Recessed, Indoor 5 pol Linect / screwless terminal block	L175 x W95 x H50

Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>902588 Junistar Lux Square Black 590lm 3000K Ra 98 Trailing edge 8W LED 74 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP44/IP20	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	L95 x W95 x H50
 <p>902597 Junistar Lux Square Black 2X 1180lm 3000K Ra 98 Trailing edge 17W LED 69 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP44/IP20	Trailing edge	Recessed, Indoor Screwless terminal block	L175 x W95 x H50
 <p>902585 Junistar Lux Square Brushed steel 590lm 3000K Ra 98 Trailing edge 8W LED 74 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP44/IP20	Trailing edge	Recessed, Indoor Screwless terminal block	L95 x W95 x H50
 <p>902594 Junistar Lux Square Brushed steel 2X 1180lm 3000K Ra 98 Trailing edge 17W LED 69 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP44/IP20	Trailing edge	Recessed, Indoor Screwless terminal block	L175 x W95 x H50
 <p>902600 Junistar Lux Square White 590lm 3000K Ra 98 DALI-2 8W LED 74 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP44/IP20	DALI-2	Recessed, Indoor / Outdoor 5 pol Linect / screwless terminal block	L95 x W95 x H50
 <p>902609 Junistar Lux Square White 2X 1180lm 3000K Ra 98 DALI-2 17W LED 69 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP44/IP20	DALI-2	Recessed, Indoor 5 pol Linect / screwless terminal block	L175 x W95 x H50

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>902582 Junistar Lux Square White 590lm 3000K Ra 98 Trailing edge 8W LED 74 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP44/IP20	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	L95 x W95 x H50
 <p>902591 Junistar Lux Square White 2X 1180lm 3000K Ra 98 Trailing edge 17W LED 69 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP44/IP20	Trailing edge	Recessed, Indoor Screwless terminal block	L175 x W95 x H50
 <p>902607 • Junistar Lux Square Black 620lm 4000K Ra 98 DALI-2 8W LED 78 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP44/IP20	DALI-2	Recessed, Indoor Screwless terminal block	L95 x W95 x H50
 <p>902616 • Junistar Lux Square Black 2X 1240lm 4000K Ra 98 DALI-2 17W LED 73 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP44/IP20	DALI-2	Recessed, Indoor Screwless terminal block	L175 x W95 x H50
 <p>902589 Junistar Lux Square Black 620lm 4000K Ra 98 Trailing edge 8W LED 78 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP44/IP20	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	L95 x W95 x H50
 <p>902598 Junistar Lux Square Black 2X 1240lm 4000K Ra 98 Trailing edge 17W LED 73 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP44/IP20	Trailing edge	Recessed, Indoor Screwless terminal block	L175 x W95 x H50

Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>902601 • Junistar Lux Square White 620lm 4000K Ra 98 DALI-2 8W LED 78 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP44/IP20	DALI-2	Recessed, Indoor Screwless terminal block	L95 x W95 x H50
 <p>902610 • Junistar Lux Square White 2X 1240lm 4000K Ra 98 DALI-2 17W LED 73 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP44/IP20	DALI-2	Recessed, Indoor Screwless terminal block	L175 x W95 x H50
 <p>902583 Junistar Lux Square White 620lm 4000K Ra 98 Trailing edge 8W LED 78 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP44/IP20	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	L95 x W95 x H50
 <p>902592 Junistar Lux Square White 2X 1240lm 4000K Ra 98 Trailing edge 17W LED 73 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP44/IP20	Trailing edge	Recessed, Indoor Screwless terminal block	L175 x W95 x H50
Accessories				
 <p>768 IsoSafe Cup Black IsoSafe Cover</p>				L55 x W75 x H55
 <p>903256 Black 1X Frame for Soft Square, Junistar Lux Square & Junistar Square DTW</p>				L140 x W140 x H4
 <p>903257 Black 2X Frame for Soft Square, Junistar Lux Square & Junistar Square DTW</p>				L258 x W140 x H4
 <p>903259 Black 3X Frame for Soft Square, Junistar Lux Square & Junistar Square DTW</p>				L376 x W140 x H4

Article	Protection	Control gear	Mounting/Connection	Dimensions
 820489 Sensor Dim Box White 200VA				L220 x W75 x H34
 903254 White 1X Frame for Soft Square, Junistar Lux Square & Junistar Square DTW				L140 x W140 x H4
 903255 White 2X Frame for Soft Square, Junistar Lux Square & Junistar Square DTW				L258 x W140 x H4
 903258 White 3X Frame for Soft Square, Junistar Lux Square & Junistar Square DTW				L376 x W140 x H4
 8246094429 Emergencybox Driver DALI / EM Self test, DALI Emergency 3 hours				L270 x W75 x H35
 820090 Emergencybox Adapter kit for downlight				L250 x W13 x H13
 8246094364 Emergencybox On-Off/Trailing edge / EM Self test, Emergency 3 hours				L270 x W75 x H35
 8246094500 Emergencybox Driver DALI / EM DALI/Self test, Emergency 3 hours				L270 x W75 x H35

• = This article is produced by order, with an expected delivery time of 3-4 weeks.