


Jupiter Pro



Jupiter Pro 2200 White 60° 2090lm 3000K Ra>90 DALI-2 / Push Dim

Article code: 960310
EAN: 7021989603108



Electrical

System wattage: 22W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 35, B16: 57, C10: 58, C16: 95

Light technic

Type of light source: LED
Luminous flux: 2090lm
Efficacy: 95 lm/W
Colour temperature: 3000K
Colour rendering (CRI): Ra>90
MacAdams factor: SDCM: 2
Lifetime: L90/B10>100,000
Light distribution: Direct
Optic: Reflector
Beam angle: 60°
UGR: UGR<25

Control/Dimming

Type: DALI-2 / Push Dim

Protection

Luminaire class: Class II SELV
IP Class: IP65/IP20

Energy and approvals

Contains light source of energy class: E
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Matte white (RAL 9003)
Optics: Tempered glass

Mounting/Connection



Mounting: Recessed, Indoor / Outdoor
Module: 2200
Connection: 5 pol Linect / screwless terminal block

Dimensions

Height (mm) H: 112
Diameter (mm) D: 114
Cut-out (mm): 83
Ceiling void depth (mm): 110
Distance to flammable materials: 100mm
Weight (kg) gross/net: 1.08 / 0.9

Packaging

Packing dimensions (mm): 142 x 142 x 140

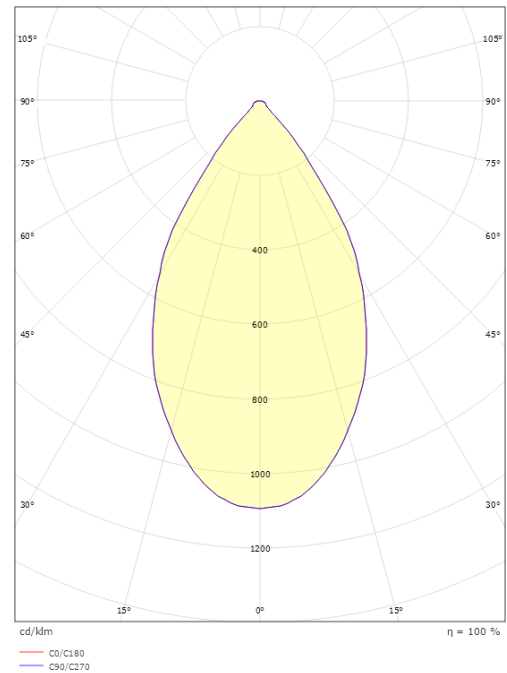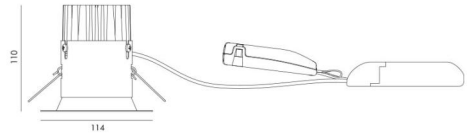

7 0 2 1 9 8 9 6 0 3 1 0 8