

Tube Eco 3-Circuit



Tube Eco 3-Circuit White 2280lm 3000K Ra>90 DALI-2

Article code: 312450
EAN: 7021983124500



Electrical

System wattage: 26W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 31, B16: 50, C10: 52, C16: 85

Light technic

Type of light source: LED
Luminous flux: 2280lm
Efficacy: 88 lm/W
Colour temperature: 3000K
Colour rendering (CRI): Ra>90
MacAdams factor: SDCM: 3
Lifetime: L90/B10>100,000
Maximum ambient temperature: 35°C
Lifetime at max ambient temperature: L90/B10>50,000
Light distribution: Direct
Optic: Reflector
Beam angle: 32°

Control/Dimming

Type: DALI-2

Protection

Luminaire class: Class I
IP Class: IP20

Energy and approvals

Contains light source of energy class: E
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Matte white (RAL 9003)
Optics: Glass

Mounting/Connection



Mounting: Surface, Indoor
Connection: ShopLine DALI track (adapter included)

Dimensions

Height (mm) H: 220
Diameter (mm) D: 92
Weight (kg) gross/net: 1.35 / 1.16

Packaging

Packing dimensions (mm): 306 x 142 x 105

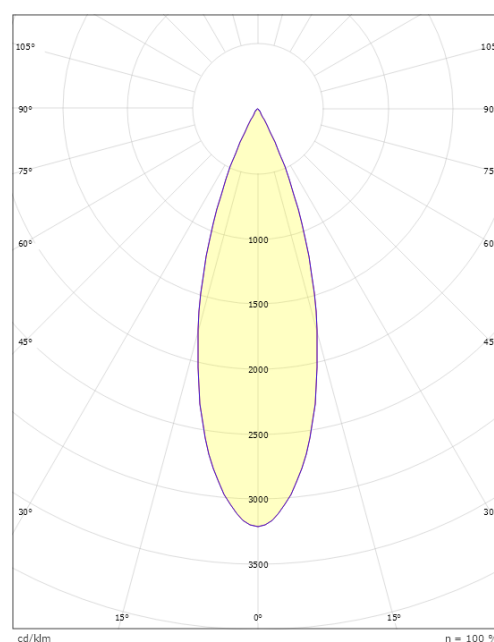

cd/kdm
— C0/C180
— C90/C270

$\eta = 100\%$



7 0 2 1 9 8 3 1 2 4 5 0 0