

View 900 White 1740lm 2700K Ra>90 Trailing edge dimming

Article code: 111430
 EAN: 7021981114305


Electrical

System wattage: 30W
 Voltage: 220-240V
 Max. luminaires per circuit breaker: B10: 12, B16: 19, C10: 14, C16: 23

Light technic

Type of light source: LED
 Luminous flux: 1740lm
 Efficacy: 58 lm/W
 Colour temperature: 2700K
 Colour rendering (CRI): Ra>90
 MacAdams factor: SDCM: 3
 Light distribution: Direct
 Optic: Opal
 UGR: UGR<28
 Photobiological safety: RG 0

Control/Dimming

Type: Trailing edge dimming

Protection

Luminaire class: Class II

Energy and approvals

Contains light source of energy class: E
 Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
 Colour: Matte white (RAL 9003)
 Optics: UV-stabilized polycarbonate

Mounting/Connection



Mounting: Surface, Indoor
 Module: 900
 Connection: Screwless terminal block

Dimensions

Length (mm) L: 896
 Width (mm) W: 135
 Height (mm) H: 60
 Depth (D): 135
 Weight (kg) gross/net: 1.621 / 1.262

Packaging

Packing dimensions (mm): 917 x 142 x 68

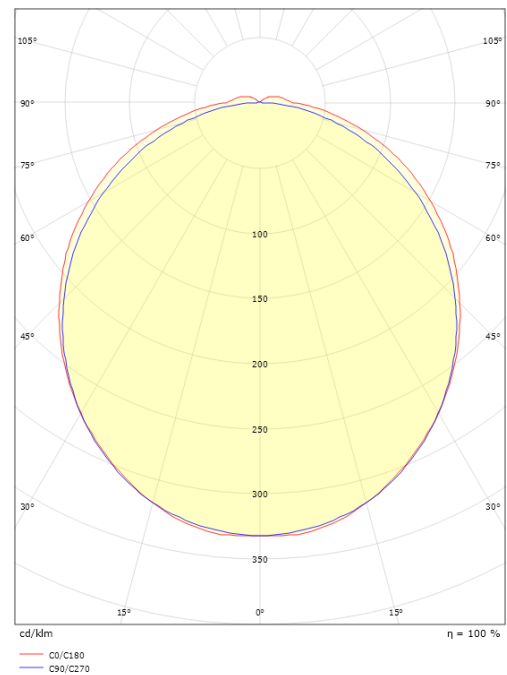

7 0 2 1 9 8 1 1 1 4 3 0 5